

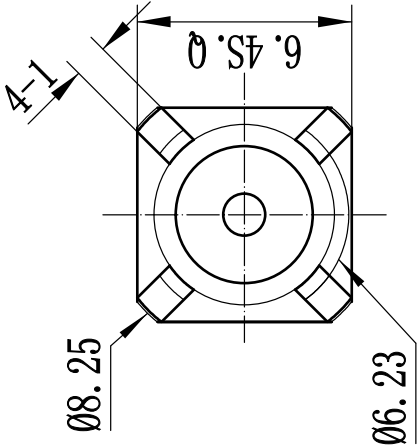


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

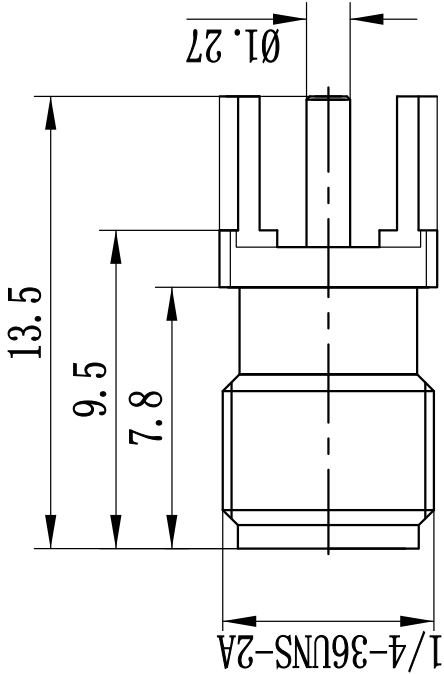

Recommended Mounting Hole

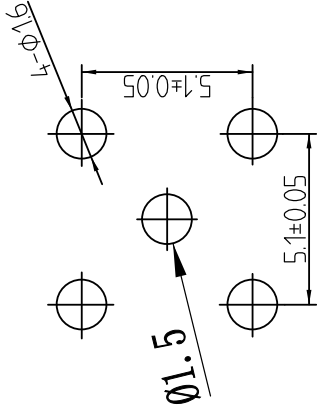

1 Electrical

- 1.1 Impedance 50 Ω
- 1.2 Frequency DC-18GHz
- 1.3 VSWR 1:20:1

2 Materials&plating

- 2.1 Body: Stainless Stainless, Gold plated
- 2.2 Insulator: Teflon
- 2.3 Contact Pin: Beryllium-copper, gold plated

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

REV	DESCRIPTION OF REVISION	TOL. NO.	BY	DATE	APPROVED
A	Initial Release	---	T. Shihua	24/12/15	24/12/15

DRAWN: T. Shihua 24/12/15	TITLE: RF Coaxial Connector		www.f-conector-china.com	
ENGINEER: C. Tao 24/12/15	SMA Female Connector PCB Mounted		DIMENSION IN MILLIMETERS (mm)	
APPROVED: H. Qiang 24/12/15	TOLERANCES UNLESS OTHERWISE SPECIFIED		X ±0.50	
	X ±0.20		XX ±0.10	
	ANGLES ±°		SIZE: A4	
	PART NO: SMA-KHD15		SCALE: N/A	
			SHEET: 1/1	
			REV: A	