


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

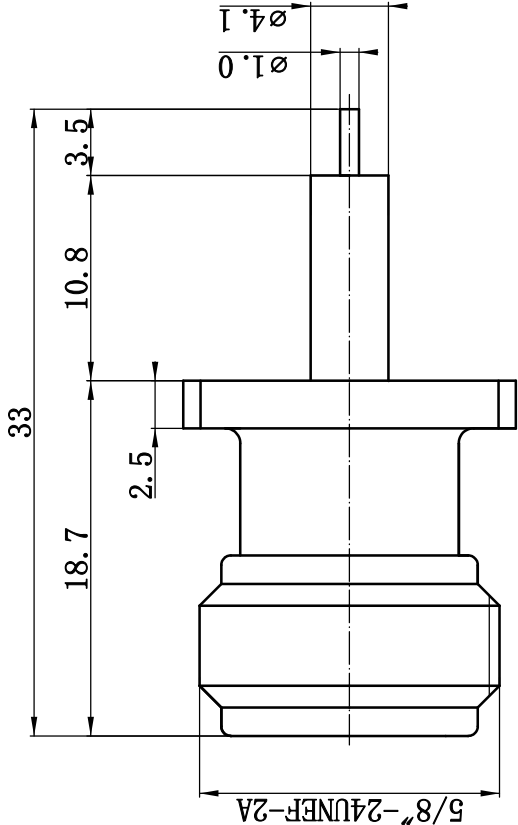


- 1 Electrical
 - 1.1 Impedance 50 Ω
 - 1.2 Frequency DC-6GHz
 - 1.3 VSWR 1.20:1
- 2 Environmental&Mechanical
 - 2.1 Temperature range -55℃~125℃
 - 2.2 RoHs Compliant
 - 2.3 Durability >500 cycles
- 3 Materials&Finish
 - 3.1 Body: Brass, Nickel-plated
 - 3.2 Insulator: Teflon
 - 3.3 Contact Pin: Bronze, gold plated

Notes:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

A

B

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Shihua	28/04/15	28/04/15

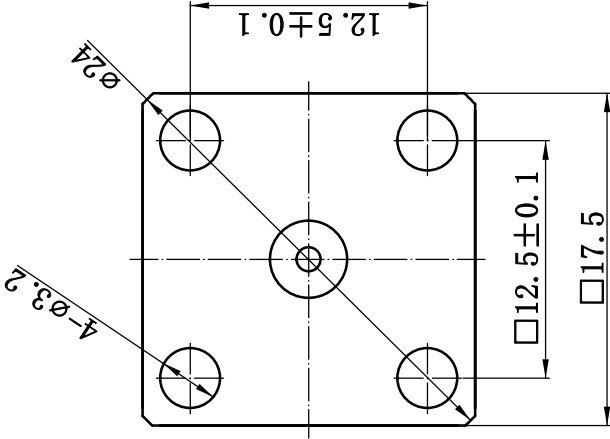

DRAWN: T. Shihua 28/04/15		TITLE:	
ENGINEER: C. Tao 28/04/15		RF Coaxial Connector	
APPROVED: W. Qiang 28/04/15		N Female Straight Flange Connector	
TOLERANCES UNLESS OTHERWISE SPECIFIED		DIMENSION IN MILLIMETERS (mm)	
X ±0.50		SCALE: N/A	
.X ±0.20		SHEET: 1/1	
.XX ±0.10		REV: A	
ANGLES ±1°		PART NO: N-KFD1007	



www.rf-conector-china.com



DIMENSION IN MILLIMETERS (mm)