

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical data

1.1 Impedance: 50 Ω

1.2 Frequency: DC-18GHz

1.3 VSWR 1.25:1
- 2 Mechanical data

2.1 Temperature range -45°C ~+85°C


2.2 Durability(matings) >500
- 3 Material&Finish

3.1 Contact: Brass, gold plated

3.2 Body: Brass, Suco-plated

3.3 Insulators: PTFE

3.4 Cupling Nut: Brass, Suco-plated

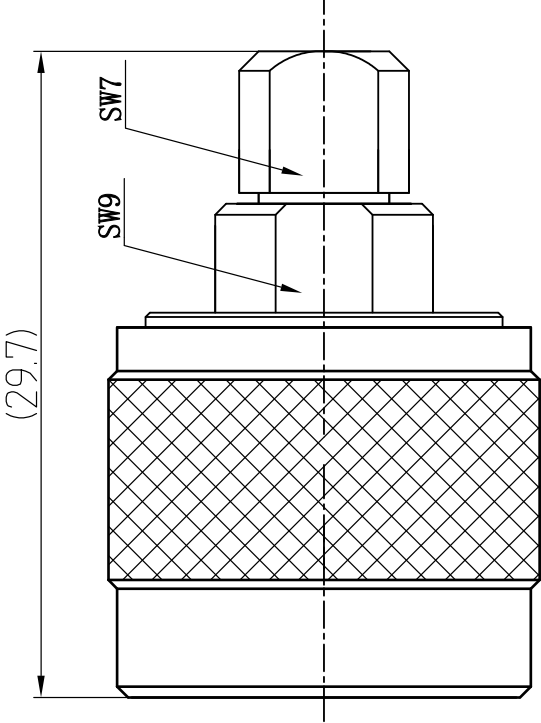

- Notes:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Shihua	18/02/14	18/02/14

DRAWN : T. Shihua 18/02/14		TITLE:		RF Coaxial Connector				www.hi-rf.com	
ENGINEER: C. Tao 18/02/14				N Male Straight Connector					
APPROVED : W. Qiang 18/02/14				For .141 Cable Clamp Type					
TOLERANCES UNLESS OTHERWISE SPECIFIED								DIMENSION IN MILLIMETERS (mm)	
X ±.050									
.X ±0.20									
.XX ±0.10									
ANGLES ±°									
PART NO:		N-JB141A		SIZE:		A4		SCALE: N/A	
				SHEET:		1/1		REV: A	



www.tri-rf.com