This document contains proprietary information and such informationmay not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	——	T.Shihua	1/8/14	1/8/14

1 Electrical

1.1 Impedance: 50Ω

1.2 Frequency: DC-40GHz

1.3 VSWR: 1.25:1

2 Mechanical&Environmental

2.1 Temperature range -55°C ~+165°C

2.2 Durability(matings) >500

2.3 RoHs Compliant Yes

3 Material&Finish

3.1 Pin contact: Beryllium-Copper, gold plated

3.2 Body: Stainless Steel(SU303), Passivated

3.3 Insulators: PEI

4 Interface Standards

4.1 2.92 MIL-STD-348A

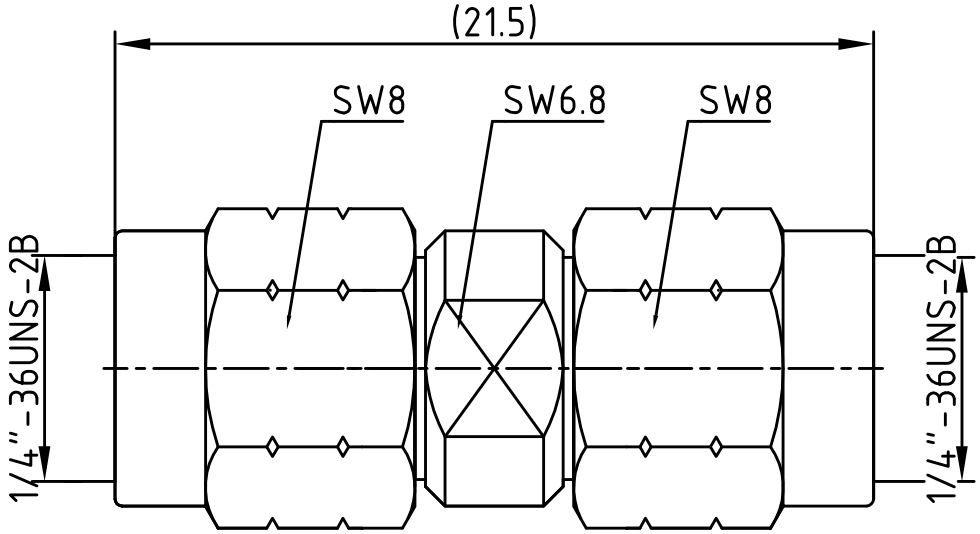

Notes:

1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME

2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 1/8/14	TITLE: Precision Adapter 2.92 Male to 2.92 Male	www.terullal.com			
ENGINEER: C.Tao 1/8/14		DIMENSION IN MILLIMETERS (mm)			
APPROVED: W.Qiang 1/8/14					
TOLERANCES UNLESS OTHERWISE SPEFICIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	PART NO: 2.92-JJG	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A