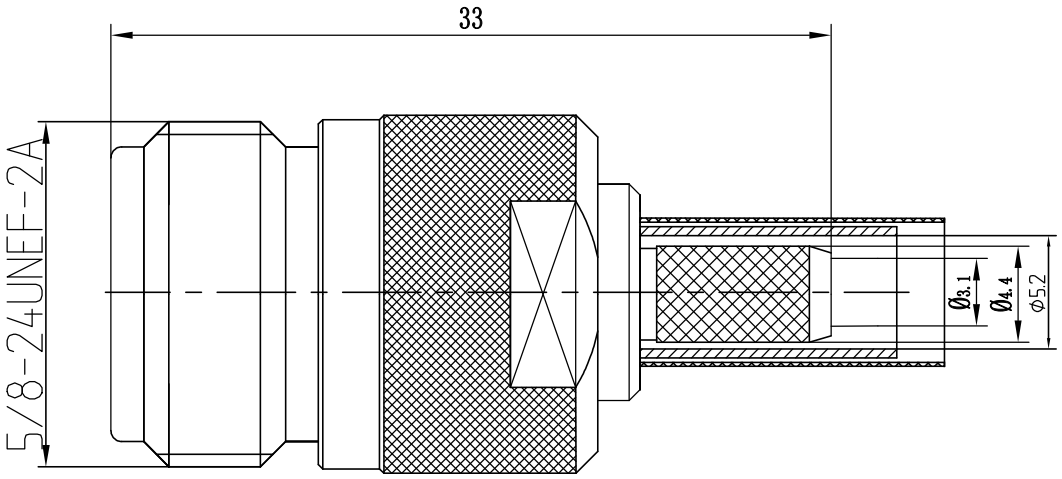


1 Electrical

1.1 Impedance: 50 Ω

1.2 Insulation resistance: ≥5000MΩ

1.3 Dielectric strength: 1500V

1.4 Contact resistance

Center contact ≤ 1MΩ

Outer contact ≤ 0.2MΩ

2 Materials&Finish

2.1 Inner Contact: Brass, gold plated

2.2 Outer Contact: Brass, Nickel plated

2.3 Insulators: PTFE

2.4 Gasket: silicon rubber

No		Name	Date
1	Designed	Michael	14-Mar-09
2	Checked	Jason	14-Mar-09
3	Approved	Teresa	14-Mar-09

Scale 1:1

N-K200Y

N female Conn. for LMR200 Cable

UNLESS OTHERWISE SPECIFIED
DIMENSIONSARE mm,TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
.X± .15 ±1°
.XX± .05
.XXX±

Xi'an T-RELY ELECTRONICS CO., LTD.