

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1

Electrical

50 Ω

0~3GHz

1.25:1
- 2

Environmental&Mechanical

-45℃~125℃


>500 cycles
- 3

Materials&plating


Brass, nickel plated

Teflon

Bronze, Gold plated

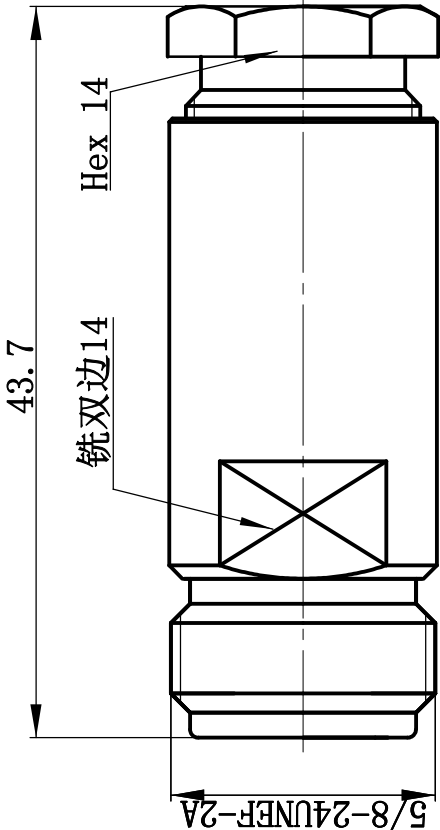

Recommended Cable Stripping Dimension

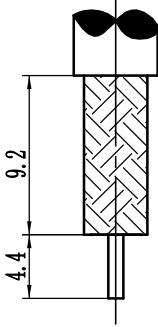

- Notes:
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
 - CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 07/04/16	TITLE:		RF Coaxial Connector	
ENGINEER: C. Tao 07/04/16			N female Clamp Conn. For 5D-FB/LMR300 Cable	
APPROVED: W. Qiang 07/04/16				
TOLERANCES UNLESS OTHERWISE SPECIFIED				
X ±0.50				
.X ±0.20				
.XX ±0.10				
ANGLES ±1°				
PART NO: N-KSD-FBA				
SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A	
		DIMENSION IN MILLIMETERS (mm)		
		www.rf-connector-china.com		