This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	———	T.Shihua	18/02/14	18/02/14

1 Electrical data


1.1 Impedance: 50Ω
1.2 Frequency: DC-6GHz
1.3 VSWR 1.25:1

2 Mechanical data

2.1 Temperature range -45°C ~+125°C
2.2 Durability(matings) >500

3 Material&Finish

3.1 Contact: Brass, gold plated
3.2 Body:Brass, nickel/gold plated
3.3 Insulators: PTFE
3.4 Coupling Nut: Brass, Nickel Plated

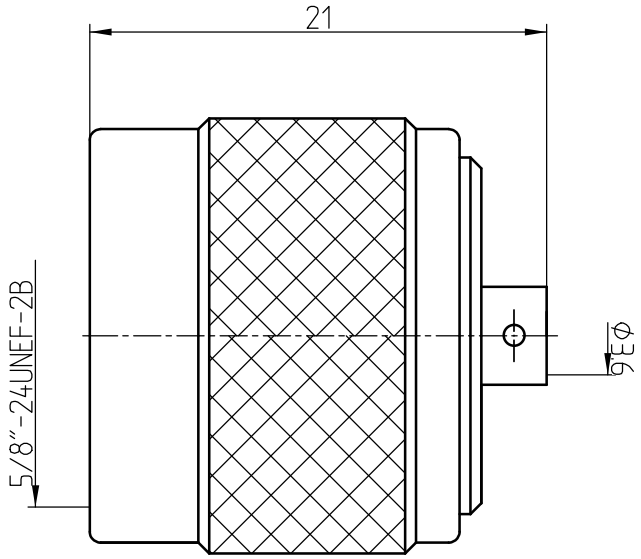

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 18/02/14
ENGINEER: C.Tao 18/02/14
APPROVED: W.Qiang 18/02/14

TOLERANCES UNLESS OTHERWISE SPEFICIED
X ±0.50
.X ±0.20
.XX ±0.10
ANGLES ±1°

TITLE:
RF Coaxial Connector
N Male Straight Connnector
For .141 Cable

PART NO: N-JB3T

www.teruilai.com

DIMENSION IN MILLIMETERS (mm)

SIZE:	SCALE:	SHEET:	REV:
A4	N/A	1/1	A