

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T.Shihua	28/04/15	28/04/15

- 1

Electrical
- 1.1

Impedence

50Ω
- 1.2

Frequency

DC~11GHz
- 1.3

Dielectric withstanding voltage

1500V(volts RMS)
- 1.4

Center contact resistance

≤ 11mΩ
- 1.5

Outer contact resistance

≤ 0.2mΩ
- 1.6

Insulation resistance:

≥5000MΩ

- 2

Environmental&Mechanical
- 2.1

Temperature range

-55℃~155℃
- 2.2

RoHS Compliant
- 2.3

Durability

>500 cycles

- 3

Materials&Finish
- 3.1

Body:



Brass, Nickel plated
- 3.2

Insulator:

Teflon
- 3.3

Contact Pin:

Bronze, silver plated

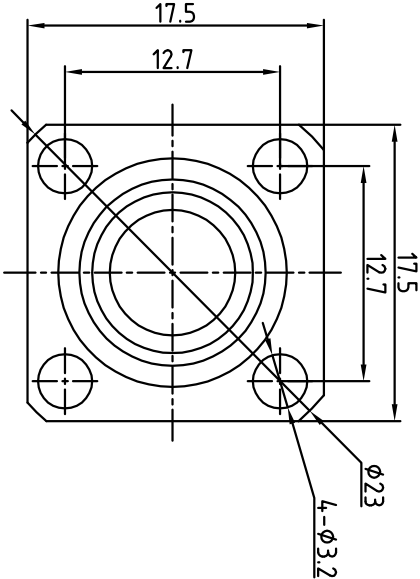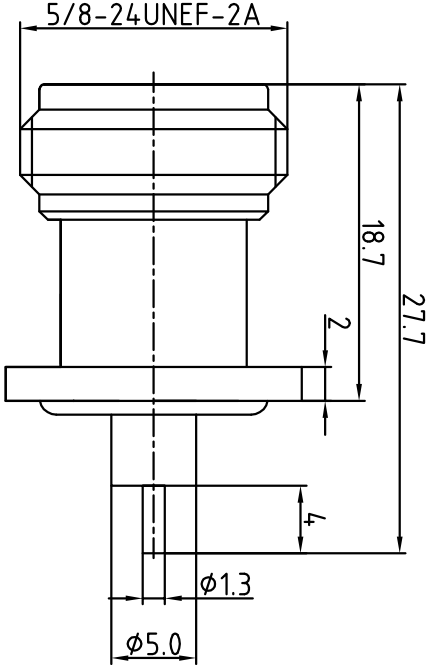

Notes:

- 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 28/04/15	TITLE: N-KFPD94	 www.terullal.com
ENGINEER: C.Too 28/04/15		
APPROVED: W.Qiang 28/04/15	N Female Straight Flange Conn. Terminal	
TOLERANCES UNLESS OTHERWISE SPECIFIED		
X ±0.20		
XX ±0.20		
ANGLES 3°		
PART NO: TRL-NF-587623	SIZE: A4	SCALE: N/A
	SHEET: 1/1	REV: A