This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission


REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	———	W.Qiang	18/03/06	18/03/06
B	New Release	———	T.Haiyun	16/07/13	16/07/13


1 Electrical电气性能
1.1 Impedance特性阻抗：78Ω
1.2 Frequency频率范围：DC～500MHz

2 Environmental&Mechanical环境&机械性能
2.1 Temperature range温度范围：-55℃～+125℃
2.2 RoHs Compliant 符合RoHs
2.3 Durability寿命：>500 cycles（次）

3 Materials&Finish材料&涂镀
3.1 Body外壳:Brass,Suco-plated 黄铜,镀三元
3.2 Insulator 绝缘介质:Teflon 聚四氟乙烯
3.3 Contact Pin中心导体:Brass Gold plated 黄铜,镀金
3.4 Coupling Nut连接螺套：Brass,Suco-plated 黄铜,镀三元

4 Suitable Cable 适配电缆： TRRG316 TRC50-1



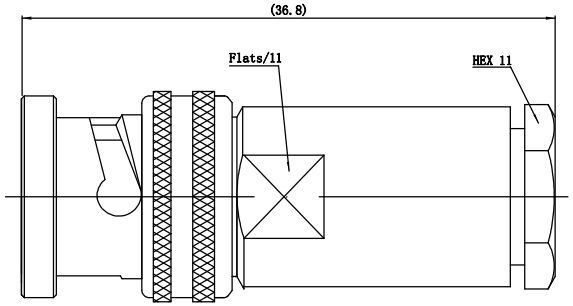

Notes:

1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME

2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Haiyun 16/07/13
ENGINEER: C.Tao 16/07/13
APPROVED: W.Qiang 16/07/13

TOLERANCES UNLESS OTHERWISE SPEFICIED
X ±0.50
.X ±0.20
.XX ±0.10
ANGLES ±1°

TITLE:
RF Coaxial Connector
TRB 3 Slot Male Connector for Cable

PART NO: TRB-J2.7A

www.teruilai.com

DIMENSION IN MILLIMETERS (mm)

SIZE:	SCALE:	SHEET:	REV:
A4	N/A	1/1	B