

[illegible]

1 Electrical data

1.1 Impedance: $50\ \Omega$

1.2 Frequency: DC-18GHz

1.3 VSWR 1.25:1

2 Mechanical data

2.1 Temperature range

2.2 Durability(matings) >500


3 Material & Finish

3.1 Contact: Brass, gold plated

3.2 Body: Brass, Suco-plated

3.3 Insulators: PTFE

3.4 Cupling Nut: Brass, Suco-plated

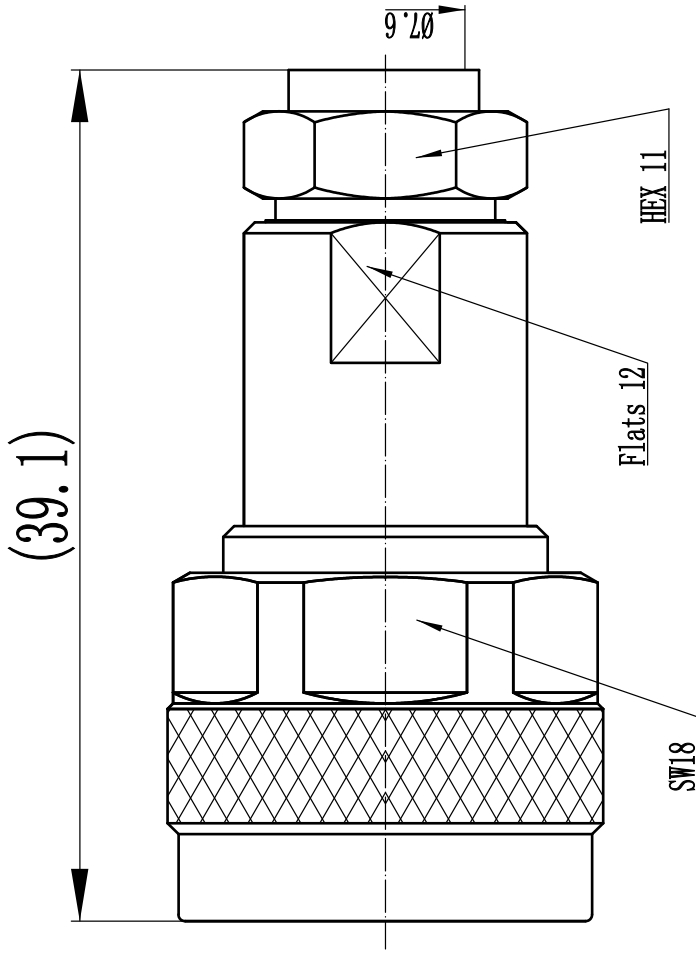

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN : T. Shihua 18/02/14		TITLE: RF Coaxial Connector N Male Straight Connector For Gore3450 Cable		 www.tri-rf.com	
ENGINEER: C. Tao 18/02/14					
APPROVED : W. Qiang 18/02/14					
TOLERANCES UNLESS OTHERWISE SPECIFIED X +0.50 X +0.20 XX +0.10 ANGLES ±°		DIMENSION IN MILLIMETERS (mm)			
PART NO: N-73450G		SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A