

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV		DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release			T.Shihua	14/08/14	14/08/14

1 Electrical


- 1.1 Impedence 50Ω
- 1.2 Dielectric withstanding voltage 1500V(volts RMS)
- 1.3 Center contact resistance ≤ 1MΩ
- 1.4 Outer contact resistance ≤ 0.2MΩ
- 1.5 Insulation resistance: ≥5000MΩ

2 Environmental&Mechanical

- 2.1 Temperature range -55℃~155℃
- 2.2 RoHS Compliant
- 2.3 Durability >500 cycles

3 Materials&plating

- 3.1 Body: Brass, nickel plated
- 3.2 Insulator: Teflon
- 3.3 Contact Pin: Brass, Gold plated
- 3.4 Housing: Brass, nickel plated
- 3.5 Nut: Brass, nickel plated
- 3.6 Gasket: Silicon rubber (red color)

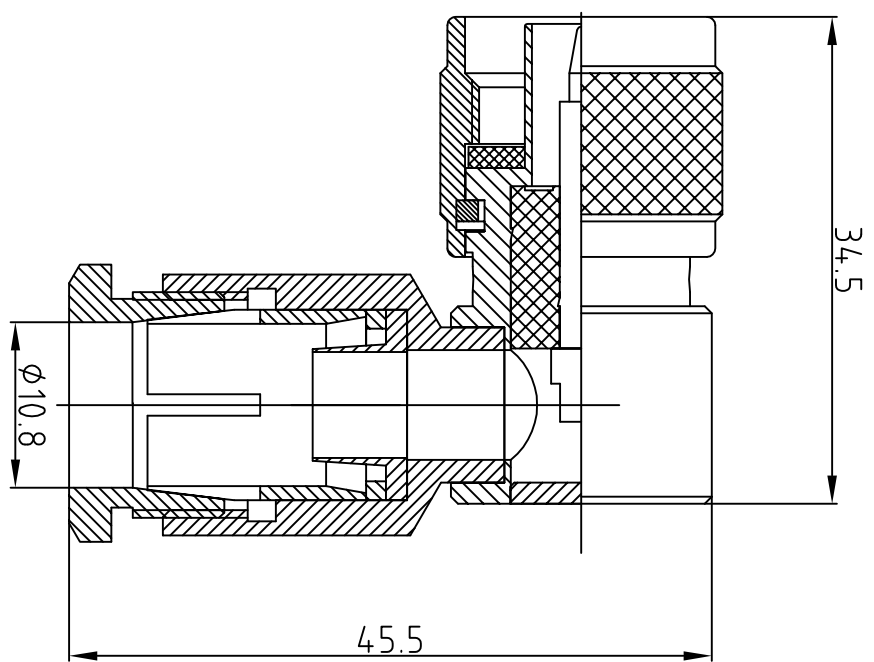

Notes:

- 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 14/08/14	TITLE: N-JW213A			 www.t-relly.com.cn	
ENGINEER: C.Too 14/08/14	N Male Right Angle Conn. For RGC213-50J (RFS) Cable Clamp				
APPROVED: W.Qiang 14/08/14	PART NO: TRL-NM-263890	SIZE: A4	SCALE: 1:1	SHEET: 1/1	REV: A
TOLERANCES UNLESS OTHERWISE SPECIFIED		DIMENSION IN MILLIMETERS (mm)			
X ±0.50					
.XX ±0.20					
ANGLES 3°					