

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T.Shihua	1/8/14	1/8/14

1 Electrical

- 1.1 Impedance: 50 Ω
1.2 Frequency: DC-18GHz
1.3 VSWR: 1.25:1

2 Mechanical&Environmental

- 2.1 Temperature range -55°C ~+165°C
2.2 Durability(matings) >500
2.3 RoHs Compliant Yes

3 Material&Finish


- 3.1 Pin contact: Beryllium-Copper, gold plated
3.2 Body: Stainless Steel(SUS303), Passivated
3.3 Insulators: PEI

4 Interface Standards

- 4.1 N MIL-STD-348A
4.2 2.92 MIL-STD-348A

Notes:

- 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

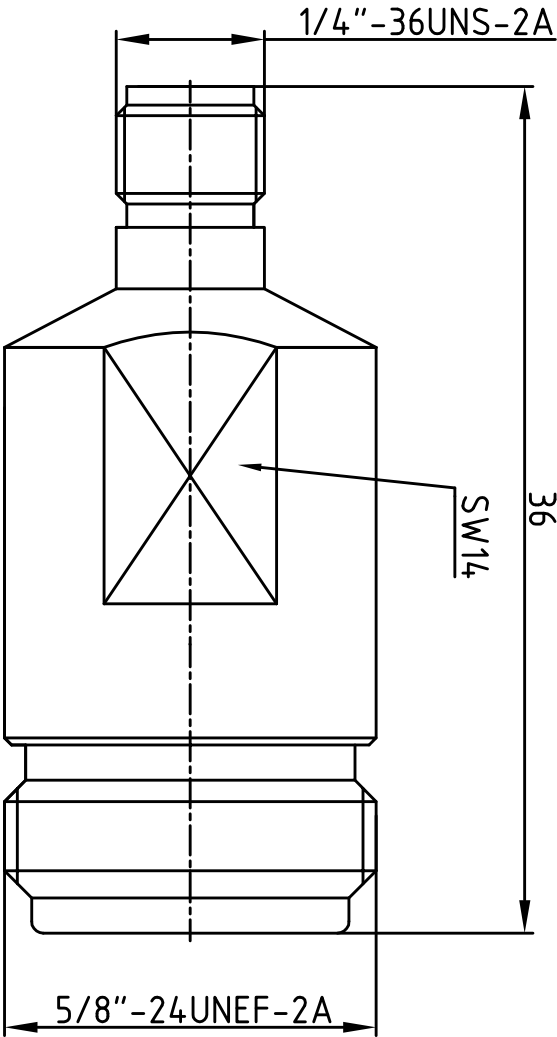

DRAWN: T.Shihua 1/8/14		TITLE:			
ENGINEER: C.Too 1/8/14		Precision Adapter			
APPROVED: W.Qiang 1/8/14		N Female to 2.92 Female			
TOLERANCES UNLESS OTHERWISE SPECIFIED					
X	±0.30	 www.terrell.com			
XX	±0.20				
ANGLES	±1°				
PART NO: N/2.92-KKG		SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A