

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical
- 1.1 Impedence
 - 1.2 Frequency
 - 1.3 Dielectric withstanding voltage
 - 1.4 Center contact resistance
 - 1.5 Outer contact resistance
 - 1.6 Insulation resistance:
 - 1.7 VSWR

50 Ω
DC ~6GHz
1000V(volts RMS)
 $\leq 3M\Omega$
 $\leq 2M\Omega$
 $\geq 5000M\Omega$
1:15:1

2 Environmental&Mechanical


- 2.1 Temperature range
- 2.2 RoHs Compliant
- 2.3 Durability

-40 $^{\circ}$ C ~+70 $^{\circ}$ C
>500 cycles

3 Materials&plating

- 3.1 Body:
- 3.2 Insulator:
- 3.3 Contact Pin:
- 3.4 Nut:

Brass; gold plated
Teflon
Bronze, gold plated
Brass, gold plated

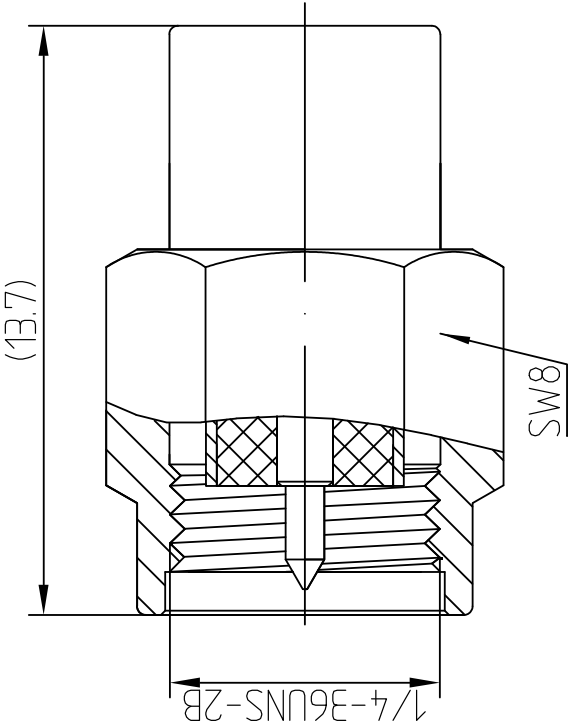

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Haiyun	23/5/14	23/5/14