


Danyang Teruilai Electronics Co., Ltd.

RF Fixed Attenuator 2.92 2 Watts DC-40GHz

ELECTRICAL DATA						
P/N	Frequency (GHz)	Attenuator Value (dB)				VSWR max
		1-9dB	10dB	20dB	30dB	
TRL-2.92MF2-40-XX	DC-40 GHz	±1.0	±1.0	±1.0	±1.0	1.35

MATERIAL&FINISH	
Outerconductor:	Stainless Steel, Passivated
Center Conductor	Beryllium-copper, Gold Plated
Body:	Aluminum
Characteristic impedance :	50Ω
Insulation Resistance :	≥ 5000MΩ
Temperature range:	-55°C~+125°C
Connector Type:	2.92mm (J, K)
Size:	Ø 8x28.7
Durability (matings):	≥ 500
VSWR:	≤ 1.35
Power:	2W
Weight:	4g

Outline Drawing:

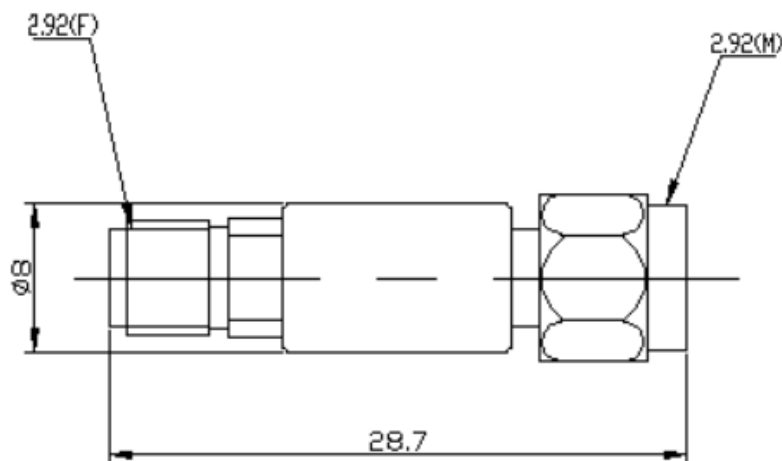

1 Liyao Road, Hi-Tech Zone, Danyang 212300 China

Tel: +86-511-86929616 Fax: +86-511-86929615

E_mail: sales@teruilai.com

www.rf-connector-china.com