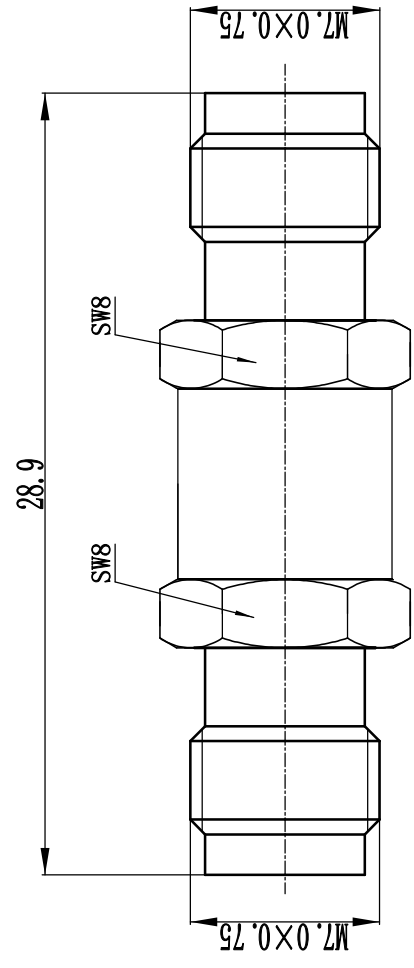


1		2		3		4	
This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission							
1 Electrical		2 Mechanical & Environmental		3 Material & Finish		4 Interface Standards	
1.1 Impedance: 50 Ω		2.1 Temperature range -45° C ~ +125° C		3.1 Pin contact: Beryllium-Copper, gold plated		4.1 1.85mm IEC-61169	
1.2 Frequency: DC-67GHz		2.2 Durability (matings) >500		3.2 Body: Stainless Steel, Passivated			
1.3 VSWR: 1.30:1		2.3 RoHs Compliant Yes		3.3 Insulators: PEI			
							
Notes: 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY							
DRAWN: T. Shihua 1/8/14				TITLE: Precision RF Adapter			
ENGINEER: C. Tao 1/8/14				1.85 Female to 1.85 Female			
APPROVED: W. Qiang 1/8/14				PART NO: 1.85-KKG-F			
TOLERANCES UNLESS OTHERWISE SPECIFIED				SCALE: N/A			
X ±0.50				SHEET: 1/1			
.X ±0.20				REV: A			
.XX ±0.10							
ANGLES ±1°							