

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1

Electrical

1.1 Impedence

1.2 Frequency

1.3 Dielectric withstanding voltage

1.4 Insulation resistance:

1.5 VSWR

50 Ω

DC~11GHz

1500V (volts RMS)

>5000MΩ

<1.20@6GHz
- 2

Environmental&Mechanical

2.1 Temperature range

2.2 RoHs Compliant

2.3 Durability

-55℃~125℃

Yes

>500 cycles
- 3

Materials&Finish

3.1 Body:


3.2 Insulator:

3.3 Contact Pin:

Brass, Nickel plated

Teflon

Bronze, Gold plated

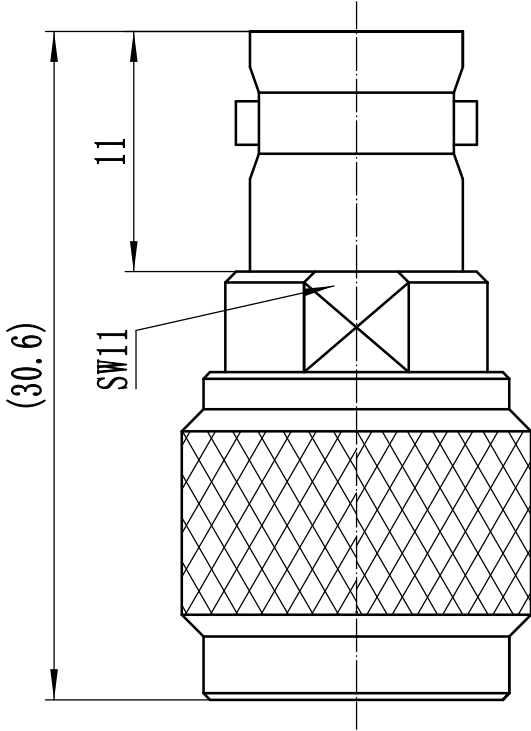

- Notes:
1.

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2.

CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 27/08/2022		TITLE	
ENGINEER: C. Tao 27/08/2022		RF Coaxial Connector	
APPROVED: W. Qiang 27/08/2022		TNC Male to BNC Female	
TOLERANCES UNLESS OTHERWISE SPECIFIED		PART NO: TNC-BNC-JK	
X ±0.50		SIZE: A4	
.X ±0.20		SCALE: 3:1	
.XX ±0.10		SHEET: 1/1	
ANGLES ±1°		REV: VA	



www.rf-connector-china.com



DIMENSION IN MILLIMETERS (mm)