This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	TRL NO.	BY	DATE	APPROVED
A	Initial Release	———	T.Shihua	25/02/2022	25/02/2022

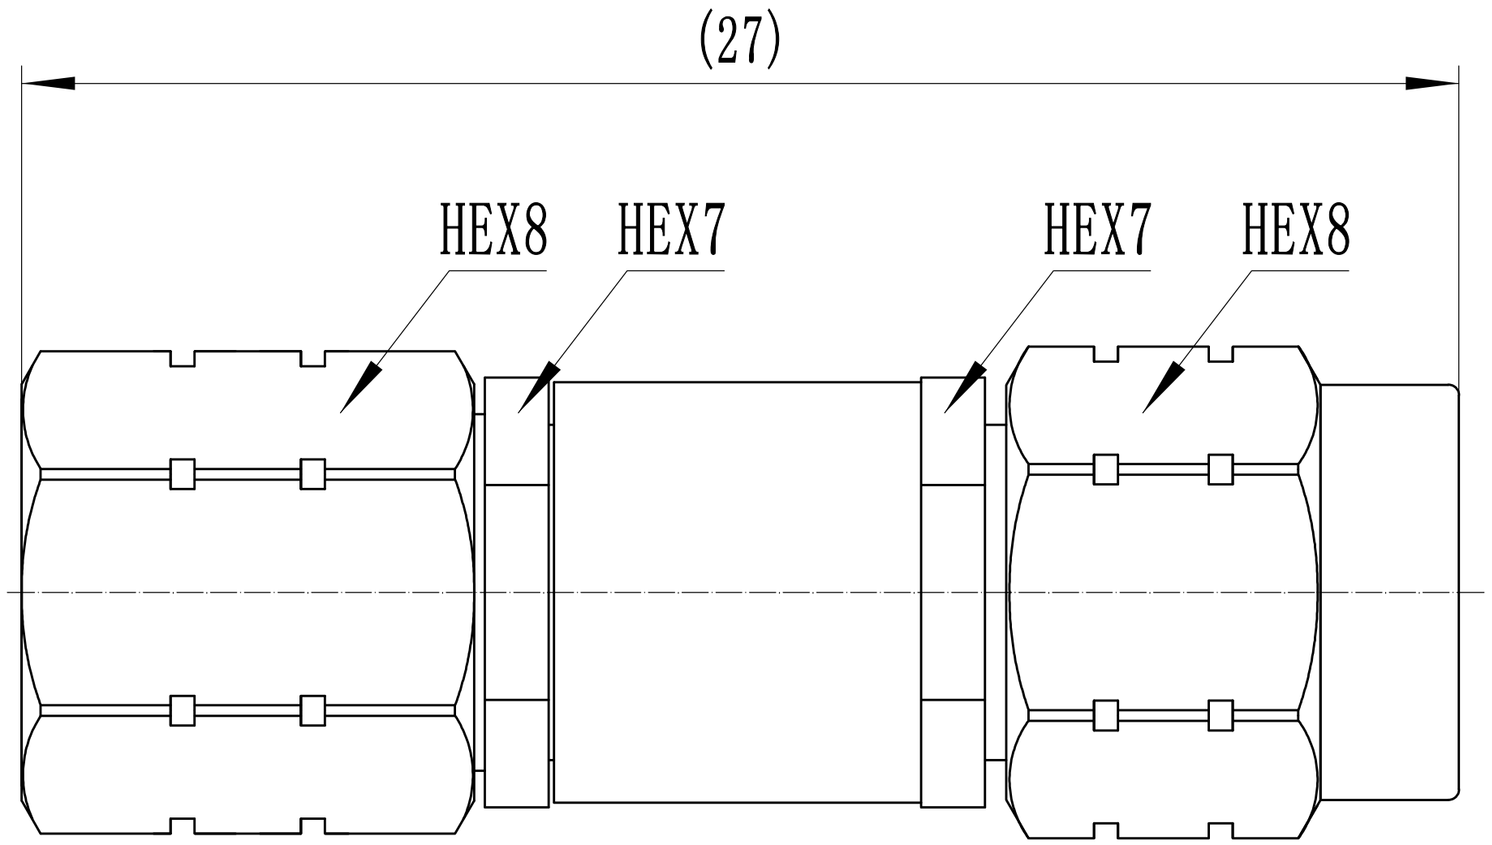

1 Electrical
1.1 Impedance: 50Ω
1.2 Frequency: DC～40GHz
1.3 VSWR: 1.20:1
1.4 Insertion Loss: 0.3dB max

2 Mechanical&Environmental
2.1 Temperature range -45℃～+125℃
2.2 Durability(matings) ＞500
2.3 RoHs Compliant Yes

3 Material&Finish
3.1 Pin contact: Beryllium-Copper, gold plated
3.2 Body: Stainless Steel, Passivated
3.3 Insulators: PEI

4 Interface Standards
4.1 2.92 MIL-STD-348A

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 01/03/2022	TITLE				
ENGINEER: C.Tao 01/03/2022	RF Coaxial Connector				
APPROVED: W.Qiang 01/03/2022	2.4 Male to 2.92 Male				
TOLERANCES UNLESS OTHERWISE SPEFICIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	PART NO: 2.4/2.92-JJG-F	SIZE: A4	SCALE: 4.5:1	SHEET: 1/1	REV: VA

www.rf-connector-china.com

DIMENSION IN MILLIMETERS (mm)