

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

1 Electrical

- 1.1 Impedance: 50 Ω
- 1.2 Frequency: DC-26.5GHz
- 1.3 VSWR: 1.25:1

2 Mechanical&Environmental

- 2.1 Temperature range -45°C ~+85°C
- 2.2 Durability(matings) >500
- 2.3 RoHs Compliant Yes


3 Material&Finish

- 3.1 Pin contact: Beryllium-Copper, gold plated
- 3.2 Body: Stainless Steel, Passivated
- 3.3 Insulators: PEI

4 Interface Standards

- 4.1 2.4 IEEE STD 287-2007
- 4.2 3.5 IEC60169

(20.4)

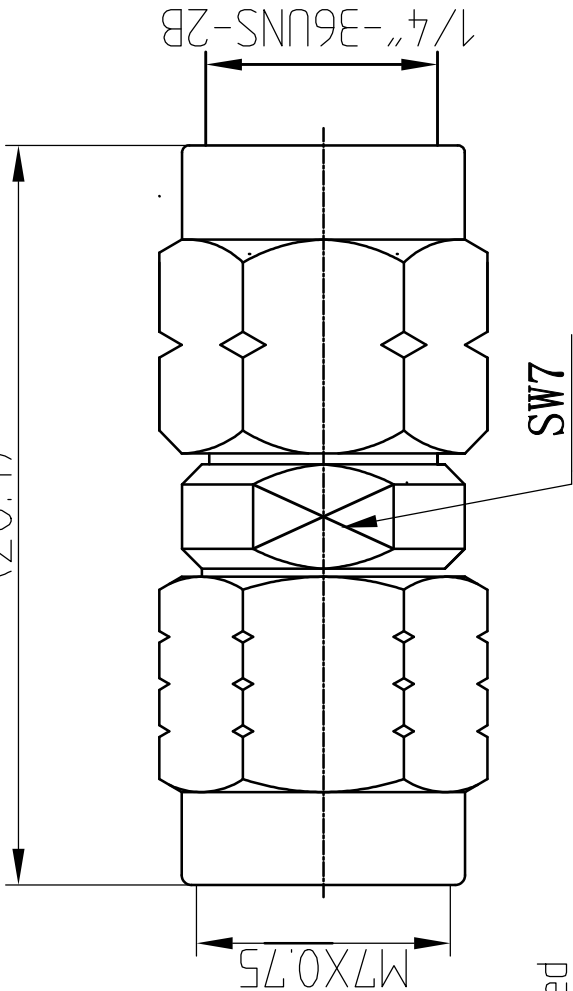

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 1/8/14		TITLE:	
ENGINEER: C. Tao 1/8/14		Precision Adapter	
APPROVED: W. Qiang 1/8/14		2.4 Male to 3.5 Male	
TOLERANCES UNLESS OTHERWISE SPECIFIED		www.tenulai.com	
X ±0.50		DIMENSION IN MILLIMETERS (mm)	
.X ±0.20		1/1	
.XX ±0.10		1/1	
ANGLES ±1°		1/1	
PART NO: 2.4/3.5-JJG		REV: A	