


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical电气性能
- 1.1 Impedance特性阻抗: 50 Ω
- 1.2 Frequency频率范围: DC~6GHz
- 1.3 VSWR电压驻波比: ≤1.25
- 2 Environmental&Mechanical环境&机械性能
- 2.1 Temperature range温度范围: -55℃~+125℃
- 2.2 RoHS Compliant 符合RoHS
- 2.3 Durability寿命: >500 cycles (次)
- 3 Materials&Finish材料&涂镀
- 3.1 Body外壳: Brass, Gold plated 黄铜, 镀金
- 3.2 Insulator 绝缘介质: Teflon 聚四氟乙烯
- 3.3 Contact Pin中心导体: Beryllium-Copper, Gold plated 铍青铜, 镀金

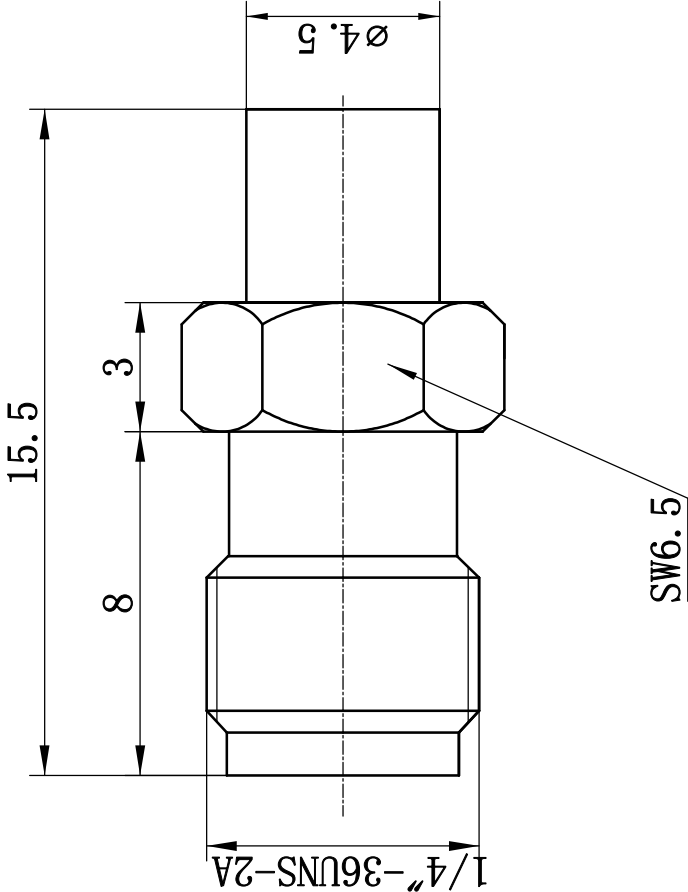

- Notes:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Haiyun 24/07/15		TITLE:	
ENGINEER: C. Tao 24/07/15		RF Adaptor	
APPROVED: W. Qiang 24/07/15		SMA Female to MCX female	
TOLERANCES UNLESS OTHERWISE SPECIFIED			
X ±0.50			
.X ±0.20			
.XX ±0.10			
ANGLES ±1°			
PART NO: SMA/MCX-KKA		SCALE: 1:1	
		SHEET: 1/1	
		REV: A	



www.terulilai.com



DIMENSION IN MILLIMETERS (mm)