

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 电气性能
- 1.1 特性阻抗

50 Ω
- 1.2 频率

DC~4GHz
- 1.3 介质耐压

750V
- 1.4 中心导体电阻

≤ 6MΩ
- 1.5 外导体电阻

≤ 1MΩ
- 1.6 绝缘电阻

≥1000MΩ
- 1.7 VSWR


≤1.30: 1

- 2 材料及涂覆
- 2.1 外壳:

黄铜;镀金
- 2.2 绝缘子:

Teflon
- 2.3 内导体:

铍青铜;镀金

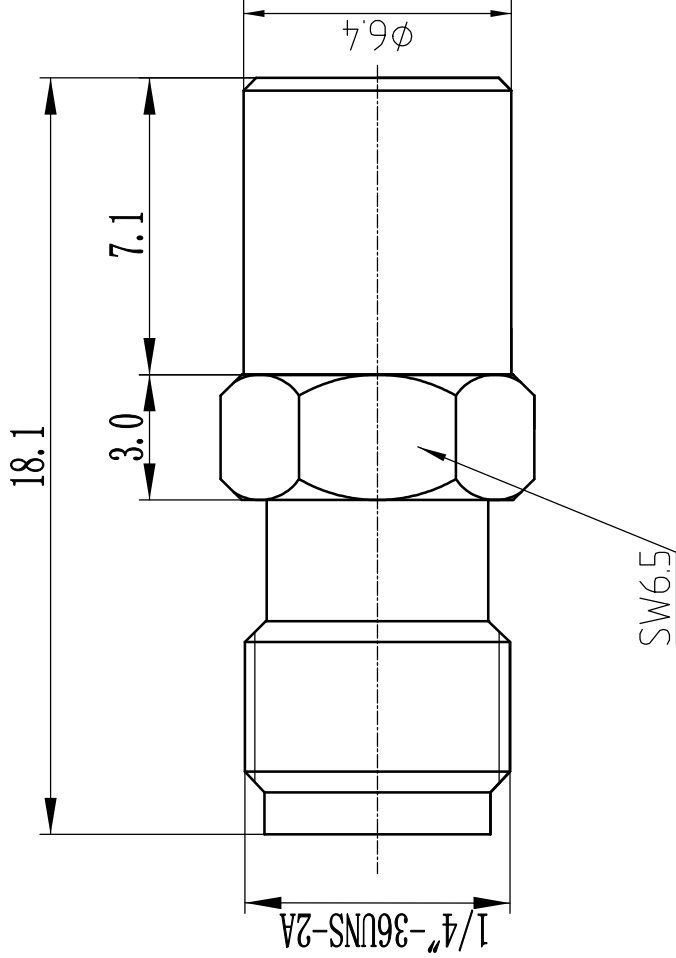

Notes:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Haiyun 24/07/15		TITLE:	
ENGINEER: C. Tao 24/07/15		RF Adaptor	
APPROVED: W. Qiang 24/07/15		SMA Female to SMB Female	
TOLERANCES UNLESS OTHERWISE SPECIFIED		PART NO: SMA/SMB-KK	
X ±0.50		SIZE: A4	
XX ±0.10		SCALE: N/A	
ANGLES ±1°		SHEET: 1/1	
		REV: A	



www.terulal.com



DIMENSION IN MILLIMETERS (mm)