


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical 电气性能
- 1.1 Impedance 特性阻抗: 50 Ω
- 1.2 Frequency 频率范围: DC~18GHz
- 1.3 VSWR 电压驻波比: ≤1.20
- 2 Environmental & Mechanical 环境 & 机械性能
- 2.1 Temperature range 温度范围: -55℃~+125℃
- 2.2 RoHs Compliant 符合RoHs
- 2.3 Durability 寿命: >500 cycles (次)
- 3 Materials & Finish 材料 & 涂镀
- 3.1 Body 外壳: Stainless Steel, Passivated 不锈钢 钝化
- 3.2 Insulator 绝缘介质: Teflon 聚四氟乙烯
- 3.3 Contact Pin 中心导体: Beryllium-Copper, Gold plated 铍青铜, 镀金

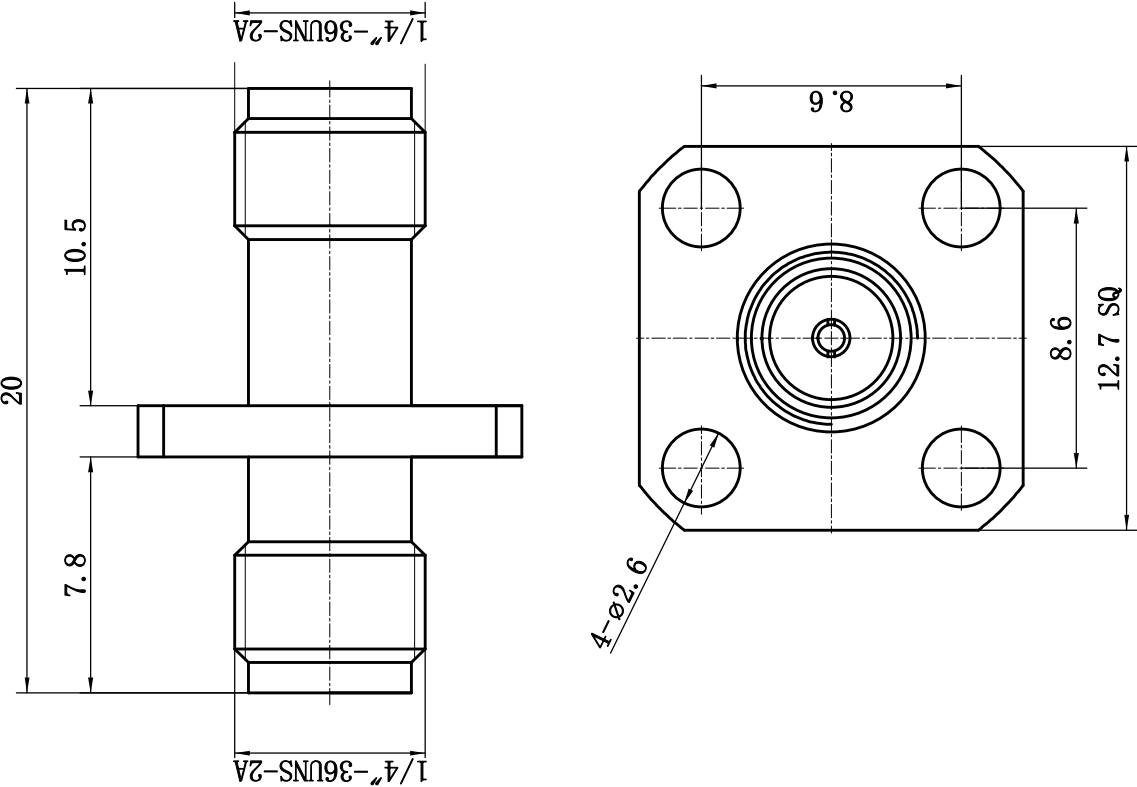

- Notes:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 26/8/16		TITLE:	
ENGINEER: C. Tao 26/8/16		Precision Adapter	
APPROVED: W. Qiang 26/8/16		SMA Female to SMA Female Flange	
TOLERANCES UNLESS OTHERWISE SPECIFIED		DIMENSION IN MILLIMETERS (mm)	
X ±0.50		SCALE: N/A	
.X ±0.20		SHEET: 1/1	
.XX ±0.10		REV: A	
ANGLES ±1°		PART NO: SMA-KFKG	