


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

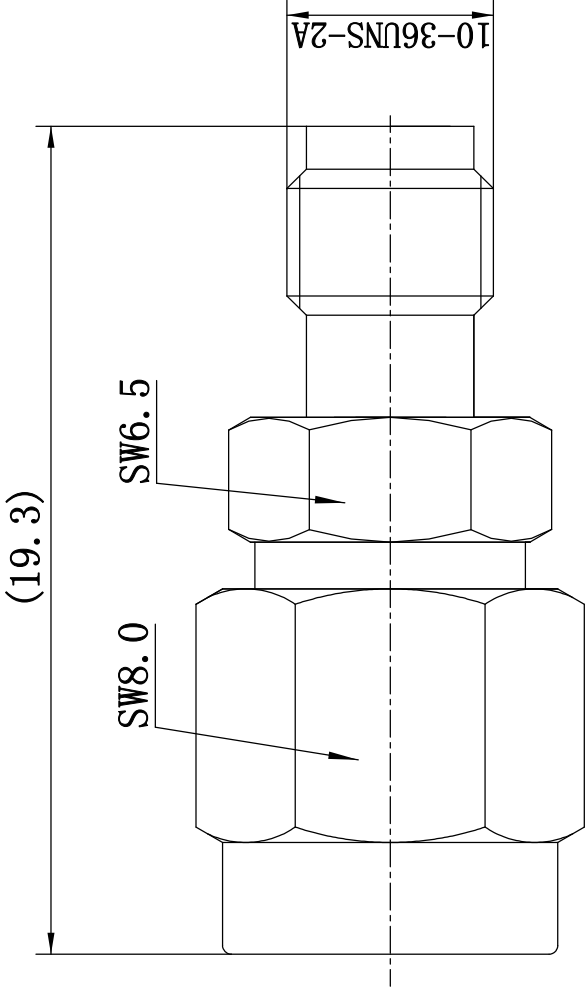

- 1 电气性能
- 1.1 特性阻抗 50 Ω
- 1.2 频率 DC~6GHz
- 1.3 VSWR ≤1.20: 1
- 2 材料及涂覆
- 2.1 外壳: 黄铜;镀金
- 2.2 绝缘子: Teflon
- 2.3 内导体: 镀青铜;镀金

DRAWN: T. Haiyun 24/07/15	TITLE:			
ENGINEER: C. Tao 24/07/15	RF Adaptor			
APPROVED: W. Qiang 24/07/15	SMA Male to SSMA Female			
TOLERANCES UNLESS OTHERWISE SPECIFIED				
X ±0.50	 www.terulilai.com			
.X ±0.20				
.XX ±0.10				
ANGLES ±1°				
PART NO: SMA/SSMA-JK	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A

- Notes:
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
 - CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY