



This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

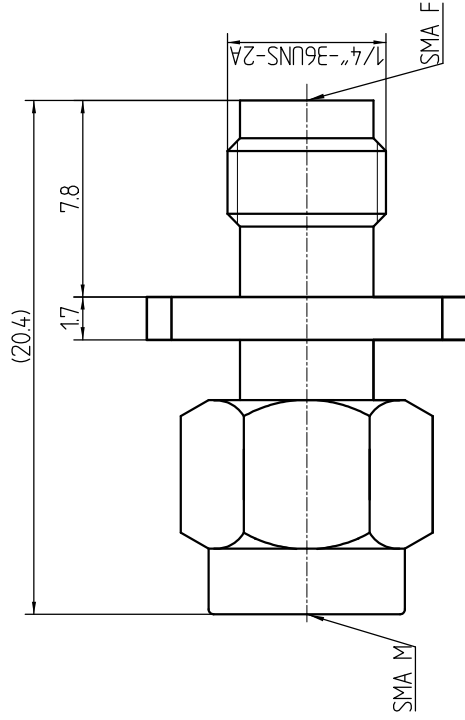

- | | | |
|-----|--------------------------|------------------------------------|
| 1 | Electrical | |
| 1.1 | Impedance: | 50 Ω |
| 1.2 | Frequency: | DC-18GHz |
| 1.3 | VSWR: | 1.20:1 |
| 2 | Mechanical&Environmental | |
| 2.1 | Temperature range | -45°C ~125°C |
| 2.2 | Durability(matings) | >500 |
| 2.3 | RoHS Compliant | Yes |
| 3 | Material&Finish | |
| 3.1 | Pin contact: | Beryllium-Copper, gold plated |
| 3.2 | Body: | Stainless Steel(SU303), Passivated |
| 3.3 | Insulators: | Teflon |
| 4 | Interface Standards | |
| 4.1 | SMA | MIL-STD-348A |

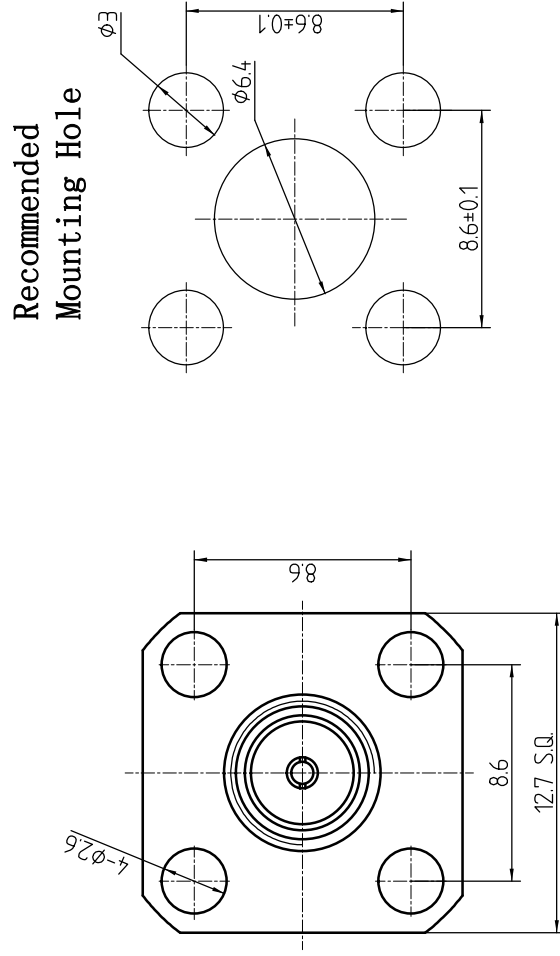

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Shihua	1/8/14	1/8/14

DRAWN: T. Shihua 1/8/14 ENGINEER: C. Tao 1/8/14 APPROVED: W. Qiang 1/8/14 TOLERANCES UNLESS OTHERWISE SPECIFIED X +0.50 XX +0.20 XX ±0.10 ANGLES ±°	TITLE: Precision Adapter		 www.rf-connector-china.com
	SMA Male to SMA Female Flange Mount		
	PART NO: SMA-JFKG		
	SIZE: A4 SCALE: N/A SHEET: 1/1 REV: A		