

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

1 Electrical


- 1.1 Impedance: $50\ \Omega$
- 1.2 Frequency: DC-6GHz
- 1.3 VSWR: 1.2:1

2 Mechanical & Environmental

- 2.1 Temperature range $-45^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 2.2 Durability (matings) >500
- 2.3 RoHS Compliant Yes

3 Material & Finish

- 3.1 Pin contact: Beryllium-Copper, gold plated
- 3.2 Body: Brass, gold plated
- 3.3 Insulators: Teflon

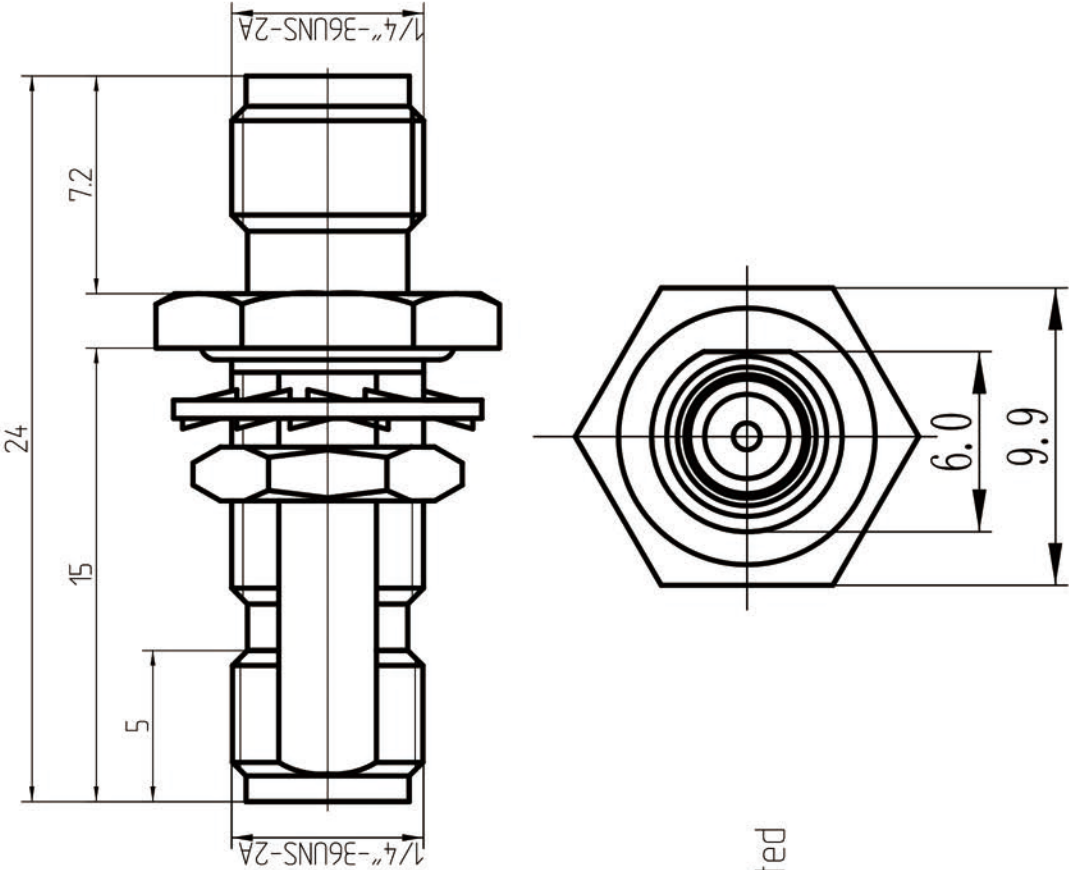

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN : T. Shihua 26/8/16		TITLE:	
ENGINEER: C. Tao 26/8/16		Precision Adapter	
APPROVED : W. Qiang 26/8/16		SMA Female to SMA Female Bulkhead	
TOLERANCES UNLESS OTHERWISE SPECIFIED		DIMENSION IN MILLIMETERS (mm)	
X ± 0.50		SIZE: A4	
X ± 0.20		SCALE: N/A	
XX ± 0.10		SUBSET: 1/1	
ANGLES $\pm 1^{\circ}$		REP: A	
PART NO: SMA-KYKUA		www.rf-conector-china.com	