

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

1 Electrical data


- | | |
|----------------|-------------|
| 1.1 Impedance: | 50 Ω |
| 1.2 Frequency: | DC-18GHz |
| 1.3 VSWR | 1.25:1 |

2 Mechanical data

- | | -45° C~+125° C |
|-------------------------|----------------|
| 2.1 Temperature range | |
| 2.2 Durability(matings) | >500 |

3 Material&Finish

- 3.1 Pin contact: Beryllium-copper, Gold plated
- 3.2 Body: Brass, gold-plated
- 3.3 Insulators: PTFE

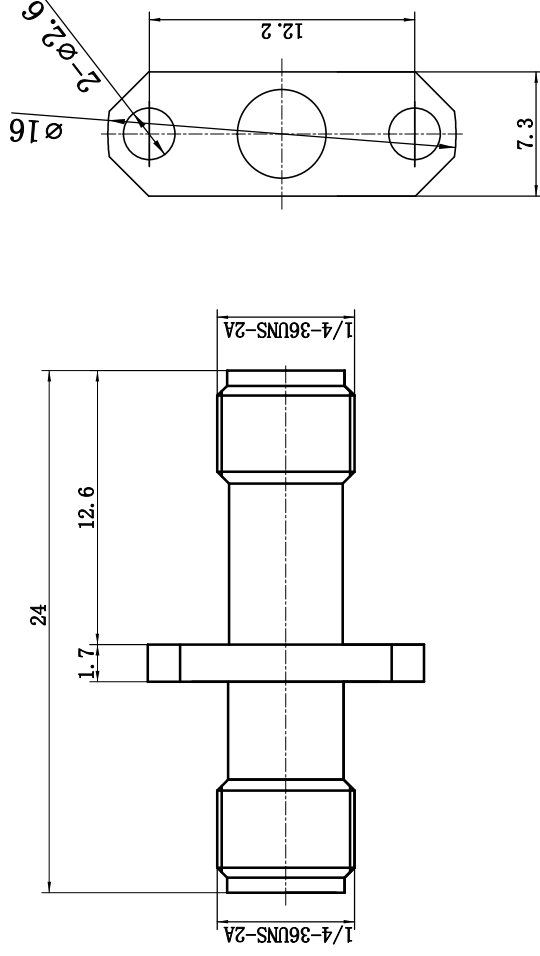

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 16/6/15	TITLE: RF Adaptor SMA Female to Female Flange Adaptor	 DIMENSION IN MILLIMETERS (mm)	 www.rf-connector-china.com		
ENGINEER: C.Tao 16/6/15					
APPROVED: W.Qiang 16/6/15					
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°					
PART NO: SMA-KFKC		SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A