

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1

Electrical

1.1 Impedence

1.2 Frequency

1.3 VSWR

50 Ω

DC~6GHz

1.20:1
- 2

Environmental&Mechanical

2.1 Temperature range

2.2 RoHs Compliant

2.3 Durability

-40℃~+125℃

>500 cycles
- 3

Materials&plating

3.1 Body:


3.2 Insulator:

3.3 Contact Pin:

Brass; Suco-plated

Teflon

Beryllium-copper, Gold plated

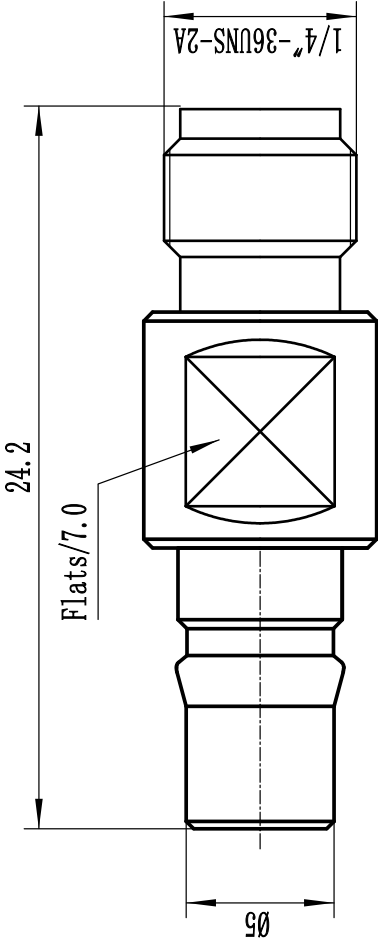

- Notes:
1.

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2.

CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN : T. Haiyun 09/06/16		TITLE:		RF Adaptor		 www.tenilla.com			
ENGINEER: C. Tao 09/06/16		QMA Female to SMA Female Adaptor							
APPROVED : W. Qiang 09/06/16		QMA Female to SMA Female Adaptor							
TOLERANCES UNLESS OTHERWISE SPECIFIED		PART NO: QMA/SMA-KK		DIMENSION IN MILLIMETERS (mm)					
X ±0.50		SIZE: A4		SCALE: N/A		SHEET: 1/1		REV: A	
.X ±0.20									
.XX ±0.10									
ANGLES ±1°									