


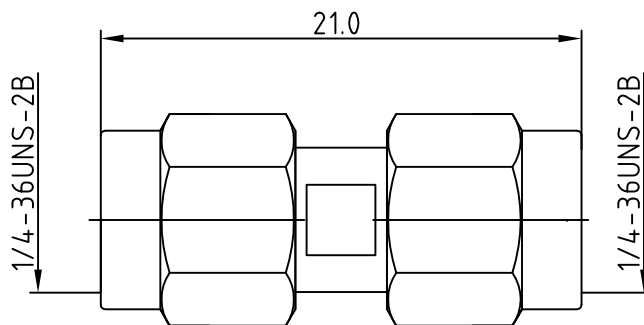

电气指标:

1. 频率范围: DC~18GHz
2. 接触电阻
内导体: $\leq 3\text{ m}\Omega$
外导体: $\leq 2\text{ m}\Omega$
3. 绝缘电阻: $\geq 5000\text{M}\Omega$
4. 介质耐压: 1000V(rms)
5. 使用寿命: 500次

执行标准: GB681(MIL-C-39012)
 材料&镀层


1. 中心接触件: 黄铜, 镀金
2. 外壳: 黄铜, 镀金
3. 绝缘子: PTFE

Electrical Characteristics:

1. Frequency range: DC~18GHz
2. Contact resistance
Center conductor: $\leq 3\text{ m}\Omega$
Out conductor: $\leq 2\text{ m}\Omega$
3. Insulation resistance: $\geq 5000\text{M}\Omega$
4. Insulator withstanding: 1000V(rms)
5. Durability: 500cycles

Application: GB681(MIL-C-39012)
 Material&Finishing

1. Center pin: **Brass, gold plated**
2. Body :brass, gold plated
3. Insulators: PTFE

FIRST ANGLE PROJECTION		SCALE	SMA-JJ-1	UNITS	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE: FRACTIONS DECIMALS ANGLES .X± .20 ±1° .XX± .10 .XXX±
THIRD ANGLE PROJECTION		2:1		mm	
	NAME	DATE	SMA male to male adaptor	REV	
DRAWN	Mike Wang	08-01-12		V1.0	
CHECKED	Magi Wang	08-01-12	Xi'an T-rely Electronics Co.,Ltd.		
APPROVED	Teresa Shen	08-01-12			