
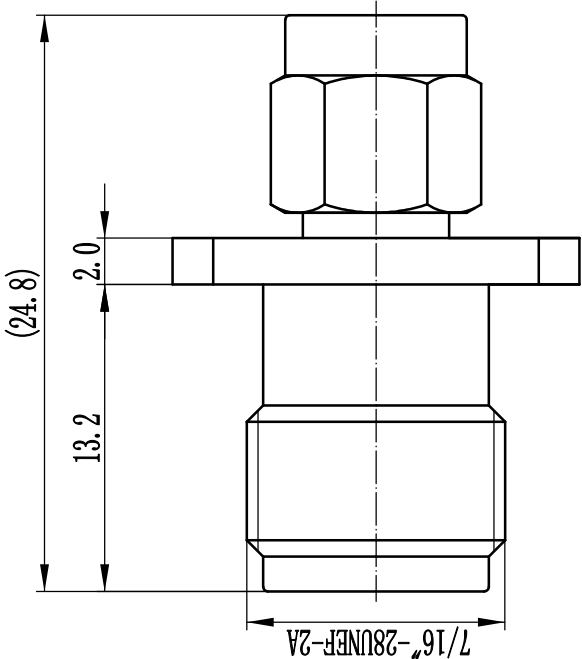


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

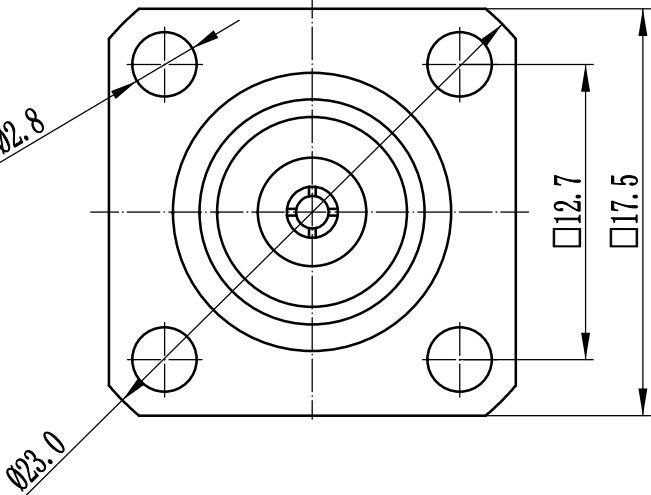

- 1 Electrical
1.1 Impedance: 50 Ω
1.2 Frequency: DC-18GHz
1.3 VSWR: 125:1
- 2 Mechanical&Environmental
2.1 Temperature range -45°C ~+125°C
2.2 Durability(matings) >500
2.3 RoHs Compliant Yes
- 3 Material&Finish
3.1 Pin contact: Beryllium-Copper, gold plated
3.2 Body: Stainless Steel(SU303), Passivated
3.3 Insulators: Teflon
- 4 Interface Standards
4.1 SMA MIL-STD-348A
4.1 TNC MIL-STD-348A

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 26/8/16		TITLE:	
ENGINEER: C. Tao 26/8/16		Precision Adapter	
APPROVED: W. Qiang 26/8/16		TNC Female to SMA Male Flange	
TOLERANCES UNLESS OTHERWISE SPECIFIED		PART NO: TNC/SMA-KF-JG	
X ±0.50		SIZE: A4	
.X ±0.20		SCALE: N/A	
.XX ±0.10		SHEET: 1/1	
ANGLES ±1°		REV: A	



www.tenulai.com



DIMENSION IN MILLIMETERS (mm)