

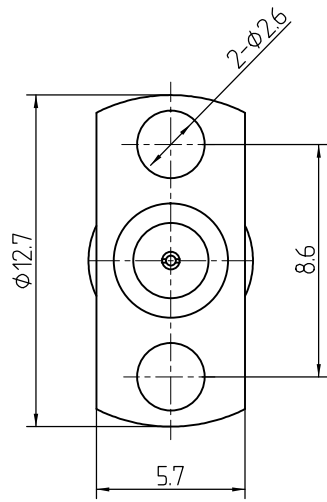


This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Haiyun	15/09/17	15/09/17

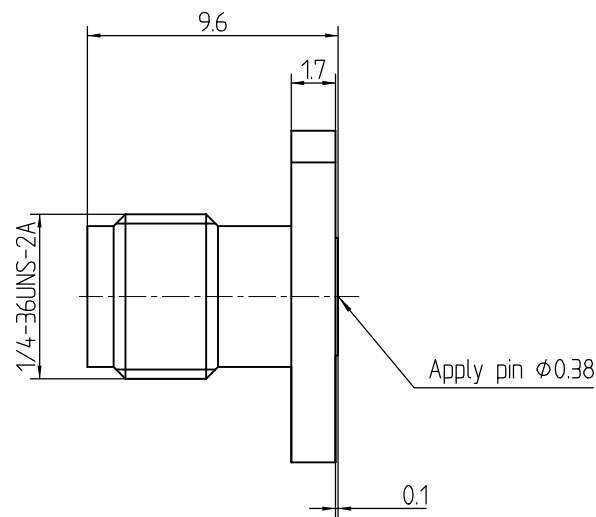

Recommended
Mounting Hole

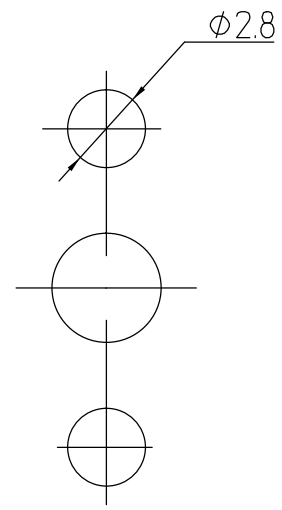


1. Electrical
1.1 Impedence 50 Ω
1.2 Frequency DC ~18GHz
1.3 VSWR 120 : 1

2. Environmental&Mechanical
2.1 Temperature range -45℃~85℃
2.2 RoHs Compliant
2.3 Durability >500 cycles

3. Materials&plating
3.1 Body: Brass, Gold plated
3.2 Insulator: Teflon
3.3 Contact Pin: Beryllium-copper, Gold plated

Notes:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Haiyun 15/09/17	TITLE: RF Coaxial Connector SMA Female Flange Conn. Terminal	 www.teruilai.com			
ENGINEER: C. Tao 15/09/17					
APPROVED: W. Qiang 12/07/08		 DIMENSION IN MILLIMETERS (mm)			
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	PART NO: SMA-KFD0. 38	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A