

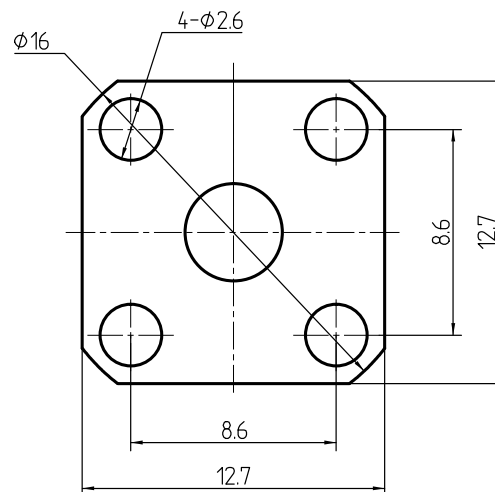


This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Haiyun	16/8/16	16/8/16

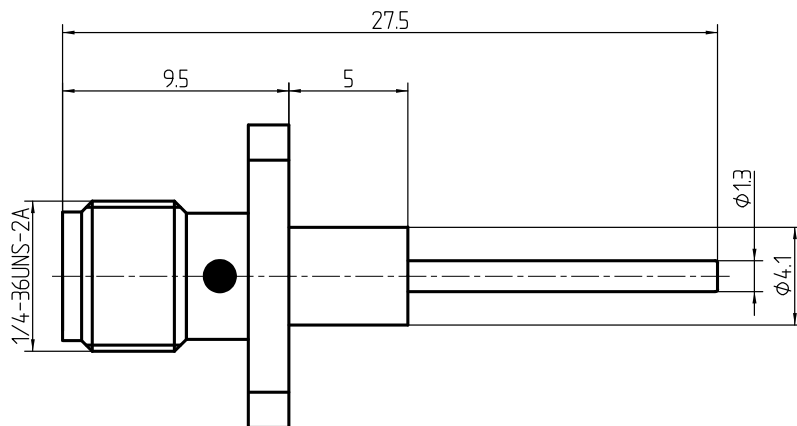

Recommended Mounting Hole

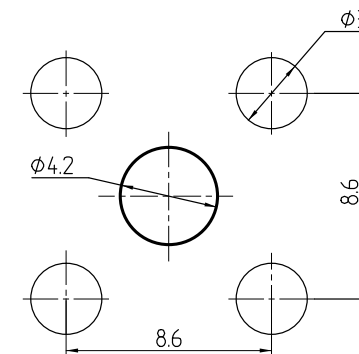

1 Electrical

1.1 Impedance	50 Ω
1.2 Frequency	DC ~18GHz
1.3 VSWR	1.20:1

2 Environmental&Mechanical

2.1 Temperature range	-45℃~125℃
2.2 RoHS Compliant	Yes
2.3 Durability	>500 cycles

3 Materials&plating

3.1 Body:	Brass; Gold, plated
3.2 Insulator:	Teflon
3.3 Contact Pin:	Beryllium Copper; Gold,plated

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN : T. Haiyun 16/8/16	TITLE: RF Coaxial Connector SMA Female Flange Connector Mount	 www.teruiai.com			
ENGINEER: C. Tao 16/8/16					
APPROVED : W. Qiang 16/8/16		 DIMENSION IN MILLIMETERS (mm)			
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°					
PART NO: SMA-KFD22B	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A	