



This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV		DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A		Initial Release		T.Shihua	25/05/16	25/05/16

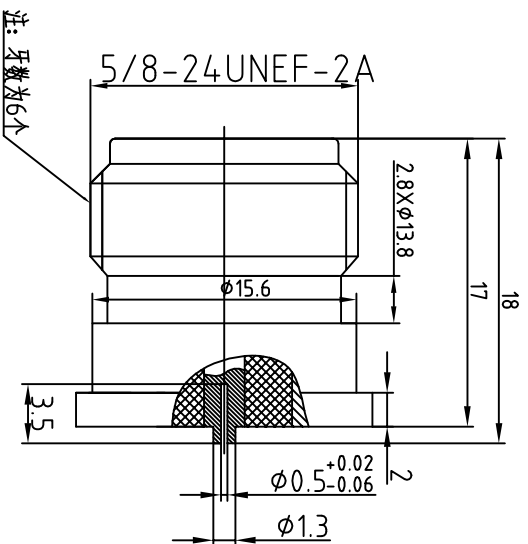

Teflon Ø8

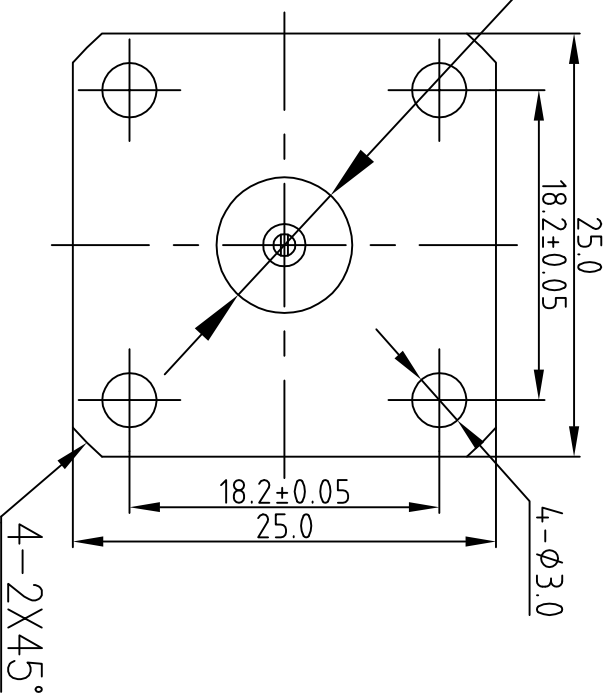

1 Electrical

- 1.1 Impedance: 50Ω
- 1.2 Frequency: 0-6GHz
- 1.3 Insulation resistance: $\geq 5000M\Omega$
- 1.4 Dielectric strength: 1500V
- 1.5 Center Contact resistance $\leq 1M\Omega$
- 1.6 Outer contact resistance $\leq 0.2M\Omega$
- 1.7 VSWR: 1.2 max

2 Materials&Finish

- 2.1 Inner Contact: Phosphor bronze, gold plated
- 2.2 Outer Contact: Brass, Suco-plated
- 2.3 Insulators: PTFE

Notes:

- 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 25/05/16		TITLE: N-NFD113		 www.terullal.com
ENGINEER: C.Liao 25/05/16		N Female Straight Flange Connector Terminal		
APPROVED: W.Qiong 25/05/16		 DIMENSION IN MILLIMETERS (mm)		
TOLERANCES UNLESS OTHERWISE SPECIFIED				
X ±0.30		SIZE: A4		
XX ±0.20				
ANGLES ±1°		SCALE: N/A		
PART NO: TRL-NF-203890				
		SHEET: 1/1		
		REV: A		