

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Haiyuan	11/06/17	11/06/17

1 Electrical 电气性能


- 1.1 Impedance 特性阻抗: 50 Ω
- 1.2 Frequency 频率范围: DC~6GHz
- 1.3 VSWR 电压驻波比: ≤1.25
- 1.4 Power 功率: 10 Watts

2 Environmental & Mechanical 环境 & 机械性能

- 2.1 Temperature range 温度范围: -45℃~+125℃
- 2.2 RoHs Compliant 符合 RoHs
- 2.3 Durability 寿命: >500 cycles (次)

3 Materials & Finish 材料 & 涂镀

- 3.1 Outer Contact 外导体: Brass, Nickel Plated 黄铜, 镀镍
- 3.2 Insulator 绝缘介质: Teflon 聚四氟乙烯
- 3.3 Contact Pin 中心导体: Bronze, Gold plated 青铜, 镀金
- 3.4 Body 外壳: Aluminium, Oxidation Blackened, 铝氧化发黑

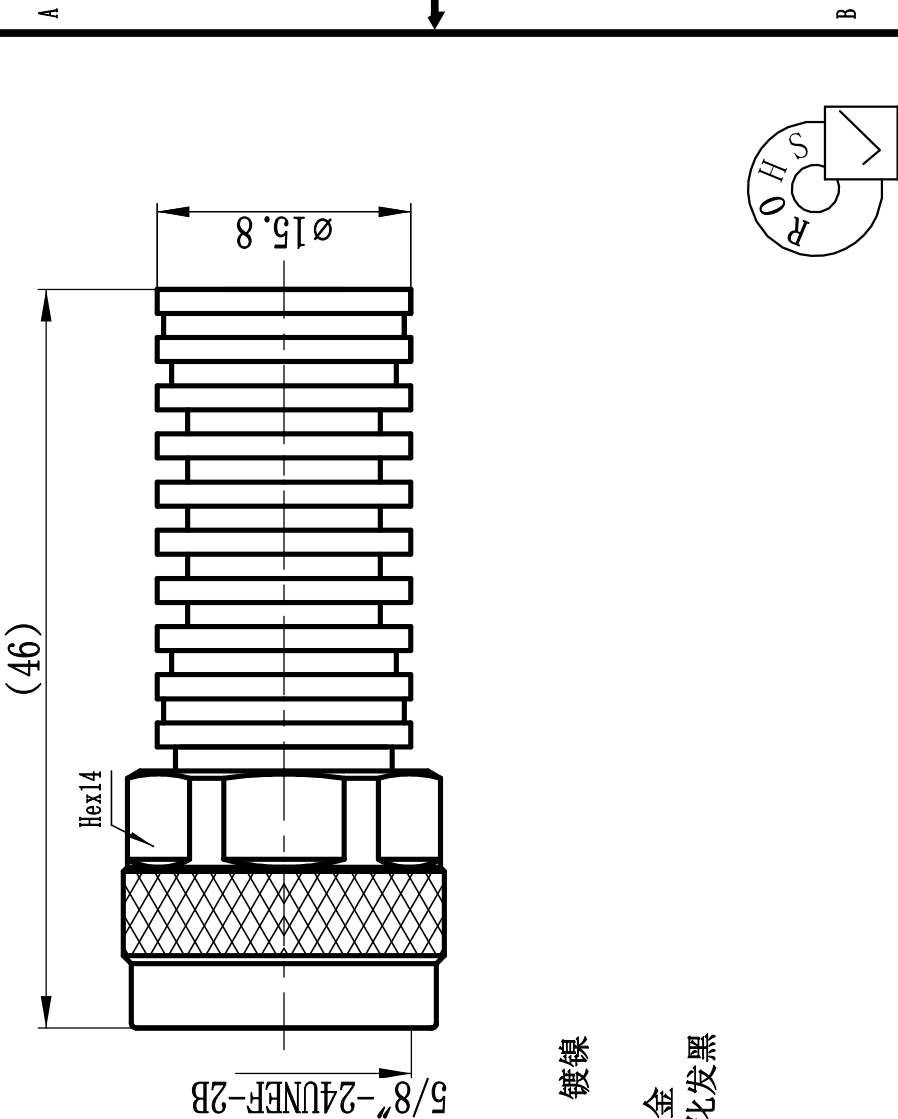

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Haiyuan 11/06/17		TITLE: RF Termination	www.rf-connector-china.com		
ENGINEER: C. Tao 11/06/17					
APPROVED: W. Qiang 11/06/17					
TOLERANCES UNLESS OTHERWISE SPECIFIED		N male Conn. Termination 10 Watts		DIMENSION IN MILLIMETERS (mm)	
X ±0.50					
X ±0.20					
XX ±0.10					
ANGLES ±1°					
PART NO: N-50JR-10-6		SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A