
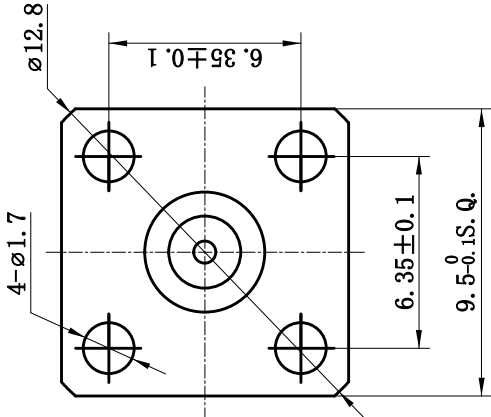


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

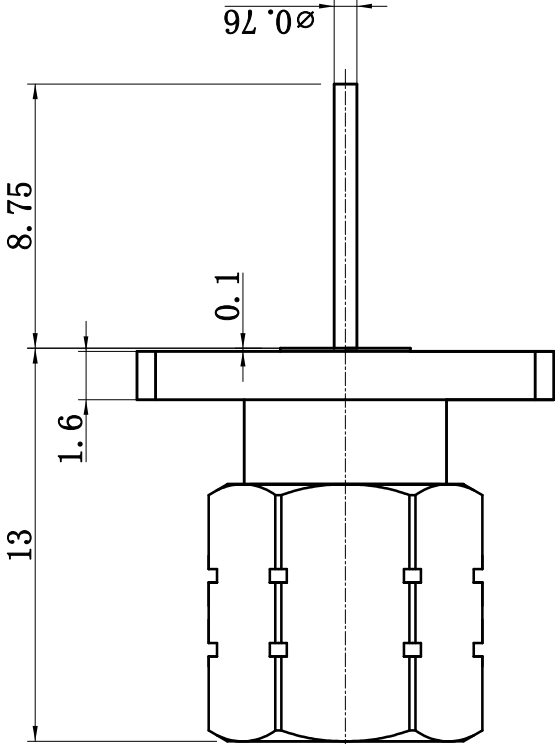

- 1 Electrical
- 1.1 Impedance: 50 Ω
 - 1.2 Frequency: DC-50GHz
 - 1.3 VSWR: ≤ 1.35
- 2 Mechanical&Environmental
- 2.1 Temperature range -45° C ~+125° C
 - 2.2 Durability(matings) >500
 - 2.3 RoHs Compliant Yes
- 3 Material&Finish
- 3.1 Pin contact: Beryllium-Copper, gold plated
 - 3.2 Body: Stainless Steel (SU303), Passivated
 - 3.3 Insulators: PEI
- 4 Interface Standards
- 4.1 2.4 IEEE STD 287-2007

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Shihua	1/8/14	1/8/14

DRAWN: T. Shihua 1/8/14		TITLE:	
ENGINEER: C. Tao 1/8/14		RF Coaxial Connector	
APPROVED: W. Qiang 1/8/14		2.4mm Male Connector Terminal	
TOLERANCES UNLESS OTHERWISE SPECIFIED		DIMENSION IN MILLIMETERS (mm)	
X ± 0.50		SCALE: N/A	
.X ± 0.20		SHEET: 1/1	
.XX ± 0.10		REV: A	
ANGLES $\pm 1^\circ$		PART NO: 2.4-JFD	