



This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

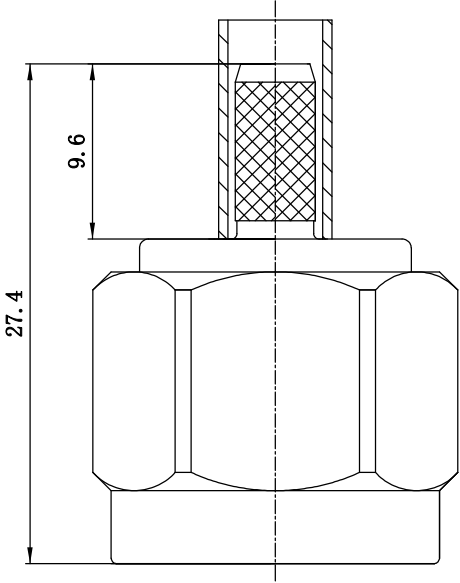

Recommended Cable Stripping Dimension

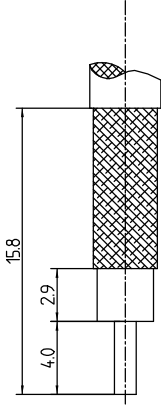

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

- 1 Electrical 电气性能
- 1.1 Impedance特性阻抗: 50 Ω
- 1.2 Frequency频率范围: DC~11GHz
- 1.3 VSWR电压驻波比: ≤1.30@6GHz
- 1.4 Insulation resistance绝缘电阻: ≥500MΩ
- 1.5 Dielectric withstanding voltage介质耐压: 1500V
- 1.6 Center contact中心导体接触电阻 ≤ 1.5mΩ
- 1.7 Outer contact外导体接触电阻 ≤ 0.2mΩ
- 2 Environmental&Mechanical环境&机械性能
- 2.1 Temperature range温度范围: -55℃~+125℃
- 2.2 RoHs Compliant 符合RoHs
- 2.3 Durability寿命: >500 cycles (次)
- 3 Materials&Finish材料&涂镀
- 3.1 Body外壳:Brass,Nickel plated 黄铜,镀镍
- 3.2 Insulator 绝缘介质:Teflon 聚四氟乙烯
- 3.3 Contact Pin中心导体:Brass,Gold plated 黄铜,镀金
- 3.4 Coupling Nut连接螺母: Brass,Nickel plated 黄铜,镀镍

DRAWN: T. Shihua 15/02/08		TITLE:		RF Coaxial Connector		®	
ENGINEER: C. Tao 15/02/08		APPROVED: W. Qiang 15/02/08		N male Conn. For		www.tenutai.com	
TOLERANCES UNLESS OTHERWISE SPECIFIED		X +0.50		LMR200/RC58/LMR195/RC223/RC142		DIMENSION IN MILLIMETERS (mm)	
X +0.20		XX +0.10		cable		1:1	
ANGLES ±°		PART NO: N-J200YA-2		SHEET: 1/1		REV: A	