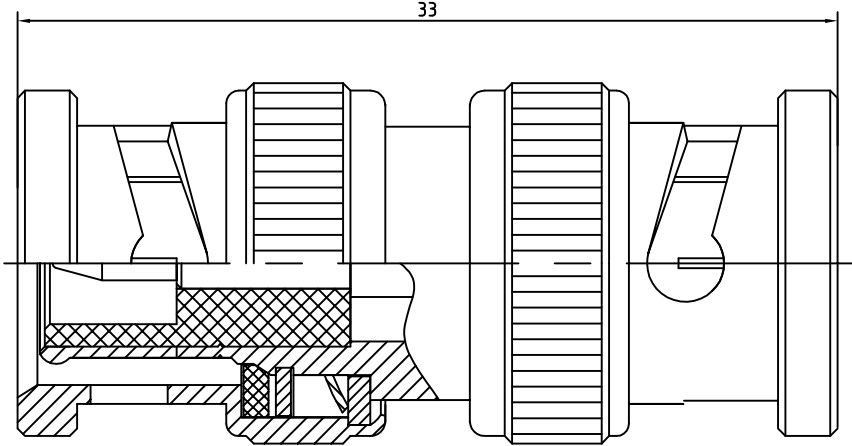



1	2	3	4									
	This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission 本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的买卖，销售及采购。											
	TRL130527B											
A												
B												
C	1 Electrical 1.1 Impedance: 50Ω 1.2 Frequency: 0-2GHz 1.3 Insulation resistance: ≥5000MΩ 1.4 Dielectric strength: 1000V 1.5 Center contact resistance≤ 2 MΩ 1.6 Outer contact resistance≤ 0.2MΩ 2 <u>Material&Finish</u> 2.1 Inner Contact: brass, gold plated 2.2 Outer Contact: Brass, nickel plated 2.3 Insulators: PTFE											
D		Scale 1:1 <table><tr><td>Name</td><td>Date</td></tr><tr><td>Designed Tomson Tang</td><td>25-Apr-13</td></tr><tr><td>Checked Jason Cai</td><td>25-Apr-13</td></tr><tr><td>Approved Teresa Shen</td><td>25-Apr-13</td></tr></table>	Name	Date	Designed Tomson Tang	25-Apr-13	Checked Jason Cai	25-Apr-13	Approved Teresa Shen	25-Apr-13	BNC-JJ BNC male to male Adaptor Xi'an T-RELY ELECTRONICS CO., LTD.	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE: FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
Name	Date											
Designed Tomson Tang	25-Apr-13											
Checked Jason Cai	25-Apr-13											
Approved Teresa Shen	25-Apr-13											