
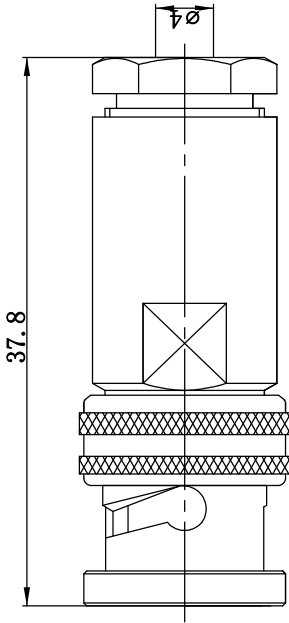


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical 电气性能
- 1.1 Impedance 特性阻抗: 78 Ω
- 1.2 Frequency 频率范围: DC~500MHz
- 2 Environmental & Mechanical 环境 & 机械性能
- 2.1 Temperature range 温度范围: -55℃~+125℃
- 2.2 RoHs Compliant 符合RoHs
- 2.3 Durability 寿命: >500 cycles (次)
- 3 Materials & Finish 材料 & 涂镀
- 3.1 Body 外壳: Brass, Suco-plated 黄铜, 镀三元
- 3.2 Insulator 绝缘介质: Teflon 聚四氟乙烯
- 3.3 Contact Pin 中心导体: Brass Gold plated 黄铜, 镀金
- 3.4 Coupling Nut 连接螺母: Brass, Suco-plated 黄铜, 镀三元
- 4 Suitable Cable 适配电缆: TRRG316 TRC50-1



Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	---	W.Qiang	18/03/06	18/03/06
B	New Release	---	T.Haiyun	16/07/13	16/07/13

DRAWN: T.Haiyun 16/07/13		TITLE:	
ENGINEER: C.Tao 16/07/13		RF Coaxial Connector	
APPROVED: W.Qiang 16/07/13		TRB 3 Slot Male Connector for Cable	
TOLERANCES UNLESS OTHERWISE SPECIFIED		TRRG316/TRC50-1 Cable	
X ±0.50		DIMENSION IN MILLIMETERS (mm)	
.X ±0.20		SCALE: A4	
.XX ±0.10		SHEET: 1/1	
ANGLES ±1°		REV: B	
PART NO: TRX-JRG316		4	



www.terulai.com

