


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

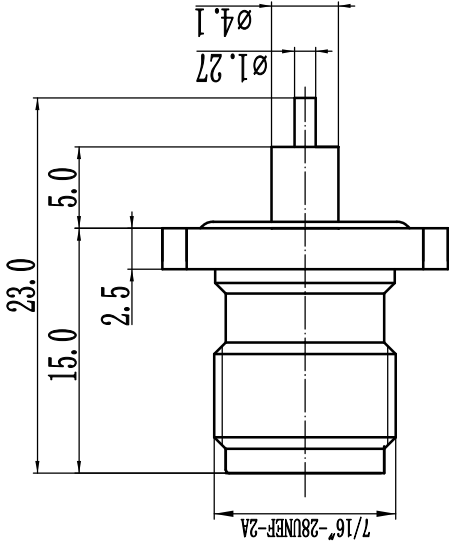

- 1 Electrical
- 1.1 Impedance

1.2 Frequency

1.3 VSWR
- 50 Ω
- DC-6GHz
- 1.25:1

- 2 Environmental&Mechanical
- 2.1 Temperature range

2.2 RoHs Compliant


2.3 Durability
- 45℃~125℃
- >500 cycles

- 3 Materials&plating
- 3.1 Body:

3.2 Insulator:

3.3 Contact Pin:
- Brass, Nickel plated
- Teflon
- Phosphor Bronze, Gold plated

Recommended Mounting Hole

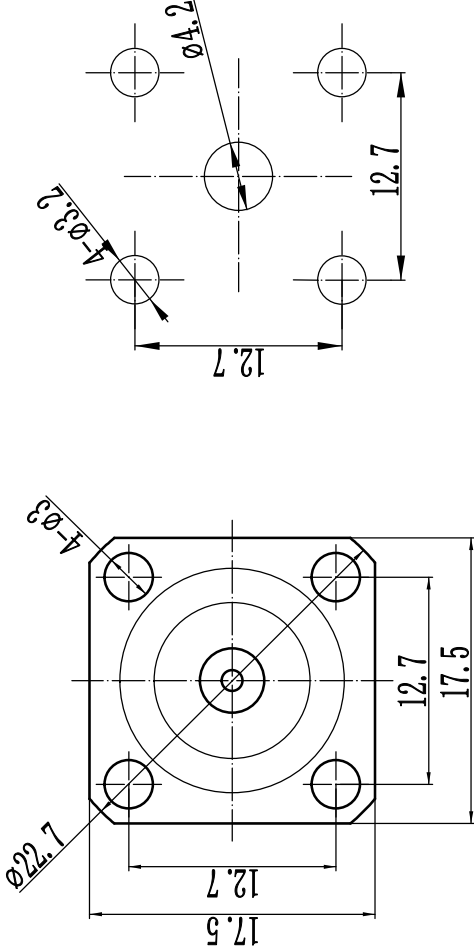

- Notes:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 02/08/13		TITLE: RF Coaxial Connector					DIMENSION IN MILLIMETERS (mm)		www.rf-connector-china.com	
ENGINEER: C. Tao 02/08/13		TNC Female Flange Connector Terminal								
APPROVED: W. Qiang 02/08/13										
TOLERANCES UNLESS OTHERWISE SPECIFIED										
X ±0.50		PART NO: TNC-RF5M		SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A			
. X ±0.20										
. XX ±0.10										
ANGLES ±1°										