
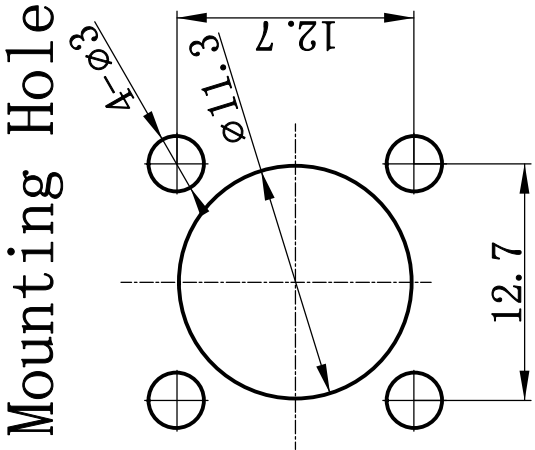


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

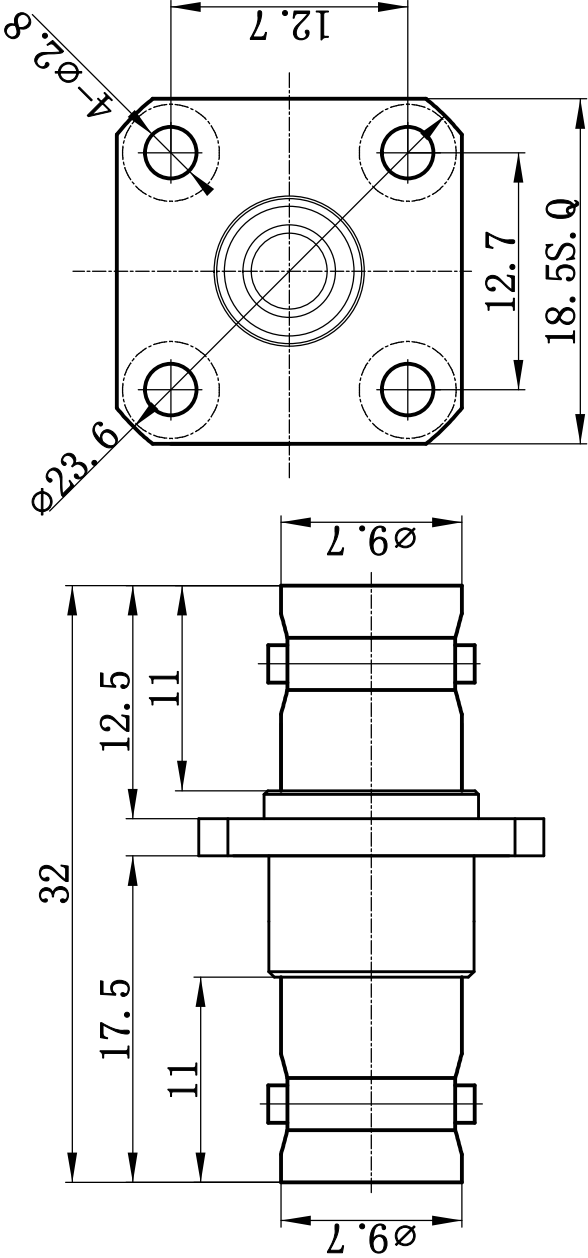

- 1 Electrical electrical performance
- 1.1 Impedance characteristic resistance: 50 Ω
 - 1.2 Frequency range: DC~6GHz
 - 1.3 VSWR voltage standing wave ratio: ≤1.30
 - 1.4 Insertion Loss (dB): ≤0.05xSqt. (f GHz)
 - 1.5 Insulation resistance: ≥5000MΩ
 - 1.6 Dielectric withstanding voltage: 1500V
- 2 Environmental & Mechanical performance
- 2.1 Temperature range: -55℃~+125℃
 - 2.2 RoHS Compliant
 - 2.3 Durability: >500 cycles (times)

- 3 Materials & Finish
- 3.1 Body: Brass, Nickel Plated
 - 3.2 Insulator: Teflon
 - 3.3 Contact Pin: Bronze, Gold Plated

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Shihua	09/07/15	09/07/15

DRAWN: T. Shihua 09/07/15		TITLE: RF Adaptor		www.rf-coaxial-connector.com	
ENGINEER: C. Tao 09/07/15		BNC Female to Female Flange adaptor		DIMENSION IN MILLIMETERS (mm)	
APPROVED: W. Qiang 09/07/15		TOLERANCES UNLESS OTHERWISE SPECIFIED		SCALE: N/A	
X ±0.50		.X ±0.20		SHEET: 1/1	
.XX ±0.10		ANGLES ±1°		REV: A	
PART NO: BNC-KFKA-F		SIZE: A4		REV: A	