

This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Haiyun	23/5/14	23/5/14

1 Electrical


- 1.1 Impedence 50 Ω
1.2 Frequency DC~18GHz
1.3 VSWR 1.30:1

2 Environmental&Mechanical

- 2.1 Temperature range -45℃~+125℃
2.2 RoHs Compliant
2.3 Durability >500 cycles

3 Materials&plating

- 3.1 Body: Stainless Steel, Passivated
3.2 Insulator: Teflon
3.3 Contact Pin: Brass, gold plated
3.4 Nut: Stainless Steel, Passivated
3.5 Gasket: Silicon Rubber

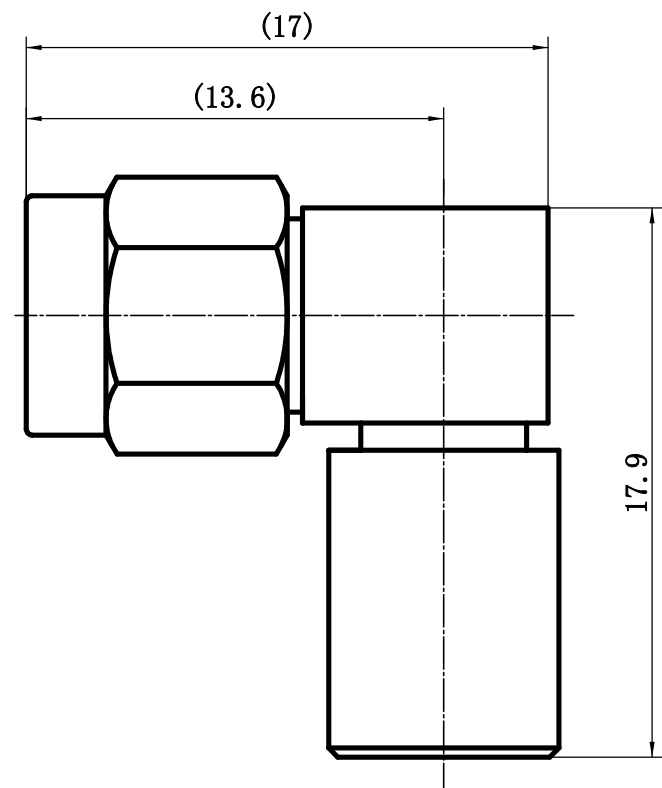

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Haiyun 25/5/14	TITLE: RF Coaxial Connector SMA Male R/A Conn. for TFLEX141/RG402 Cable	 www.rf-connector-china.com			
ENGINEER: C. Tao 25/5/14					
APPROVED: W. Qiang 25/5/14		 DIMENSION IN MILLIMETERS (mm)			
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	PART NO: SMA-JW141AG	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A