


TRL101024E

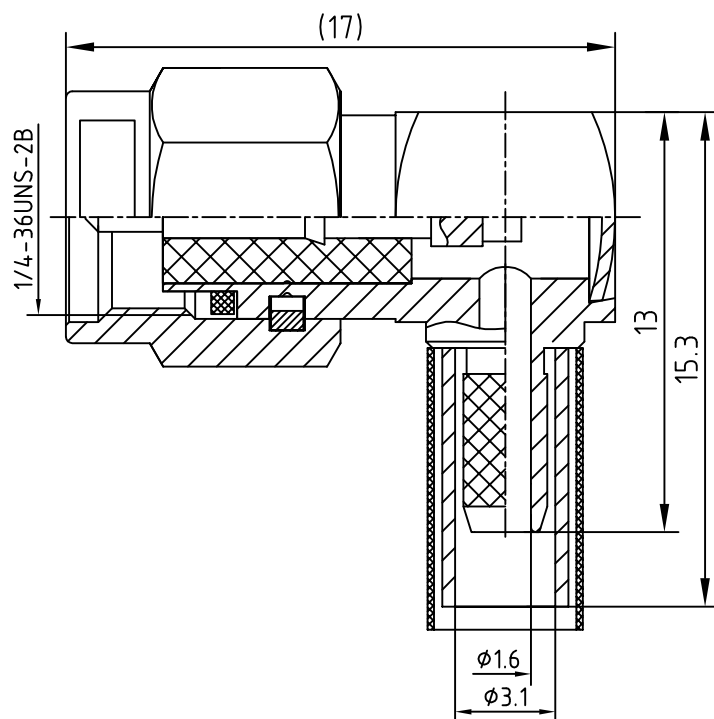

Notes:

Electrical characteristics

1.Impedance: 50Ω

2.Working voltage: $\leq 335V$

3.Insulation resistance: $\geq 5000M\Omega$

4.Dielectric strength: $1000V$

5.Contact resistance

Center contact $\leq 3M\Omega$


Outer contact $\leq 2.5M\Omega$

Material&Finish

Inner Contact: gold plated over Brass

Outer Contact: gold plated over brass.

Insulators: Teflon



Scale

1:1

Name

Date

Designed

Tomson

24-Oct-08

Checked

Jason

24-Oct-08

Approved

Teresa

24-Oct-08

SMA-JW3
RF Coaxial Connector

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES

.X $\pm$.15 $\pm 1^\circ$
.XX $\pm$.05
.XXX $\pm$

Xi'an T-RELY ELECTRONICS CO., LTD.