

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical electrical performance
- 1.1 Impedance characteristic resistance: 50Ω

1.2 Frequency range: DC~26.5GHz

1.3 VSWR voltage ratio: ≤1.20@18GHz

1.4 Insulation resistance: ≥5000MΩ

1.5 Dielectric withstanding voltage: 1000V
- 2 Environmental & Mechanical performance
- 2.1 Temperature range: -55℃~+125℃


2.2 RoHS Compliant

2.3 Durability life: >500 cycles (times)
- 3 Materials & Finish
- 3.1 Body: Stainless Steel, Passivated

3.2 Insulator: Teflon


3.3 Contact Pin: Beryllium-copper, Gold plated

3.4 Coupling Nut: Stainless Steel, Passivated

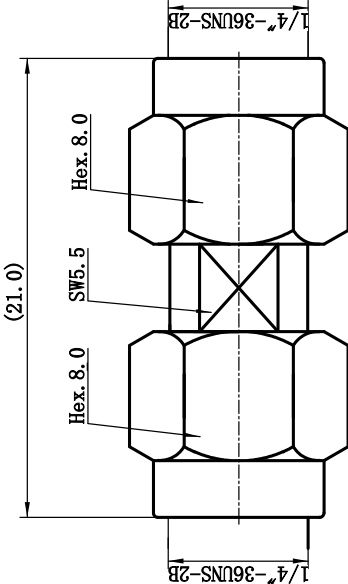

- Notes:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 08/10/2022		TITLE				DIMENSION IN MILLIMETERS (mm)
ENGINEER: C. Tao 08/10/2022						
APPROVED: W. Qiang 08/10/2022		Coaxial Adaptor				
TOLERANCES UNLESS OTHERWISE SPECIFIED			SMA Male to SMA Male			
X ±0.50				PART NO: SMA-JJG-F		
.X ±0.20						
.XX ±0.10						
ANGLES ±1°		SIZE: A4	SCALE: 3:1	SHEET: 1/1	REV: 1/1	REV: 1/1