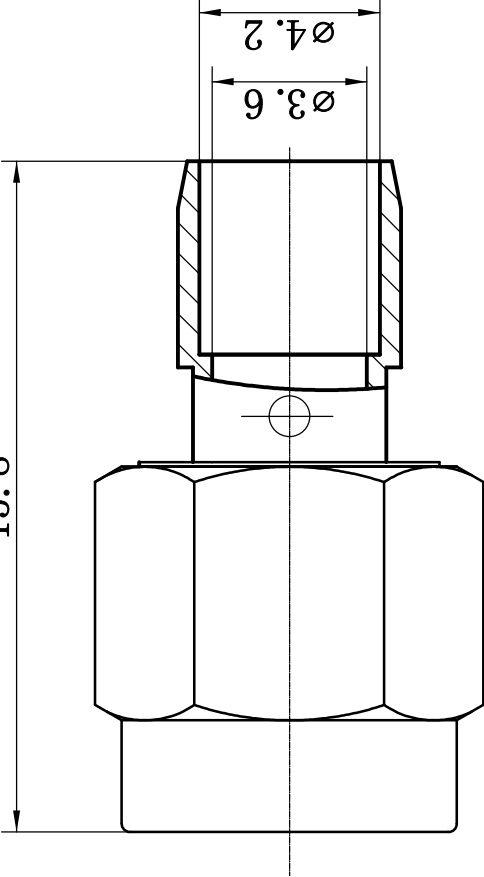


1		2		3		4	
This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission							
1 Electrical		2 Environmental&Mechanical		3 Materials&plating		4	
1.1 Impedence 50 Ω		2.1 Temperature range -45℃~+125℃		3.1 Body: Brass; Gold Plated		A	
1.2 Frequency DC~18GHz		2.2 RofIs Compliant		3.2 Insulator: Teflon		B	
1.3 VSWR ≤1.30:1		2.3 Durability >500 cycles		3.3 Contact Pin: Brass, gold plated			
				3.4 Nut: Stainless Steel, Passivated			
				3.5 Gasket: Silicon Rubberr			
							
Notes: 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY							
TITLE: RF Coaxial Connector							
DRAWN: T. Haiyun 25/03/07							
ENGINEER: C. Tao 25/03/07							
APPROVED: W. Qiang 25/03/07							
TOLERANCES UNLESS OTHERWISE SPECIFIED							
X ±0.50							
.X ±0.20							
.XX ±0.10							
ANGLES ±1°							
PART NO: SMA-JB402S							
SCALE: N/A							
SHEET: 1/1							
REV: A							
DIMENSION IN MILLIMETERS (mm)							
www.rf-connector-china.com							