


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Shihua	1/8/14	1/8/14

Recommend Mounting Hole

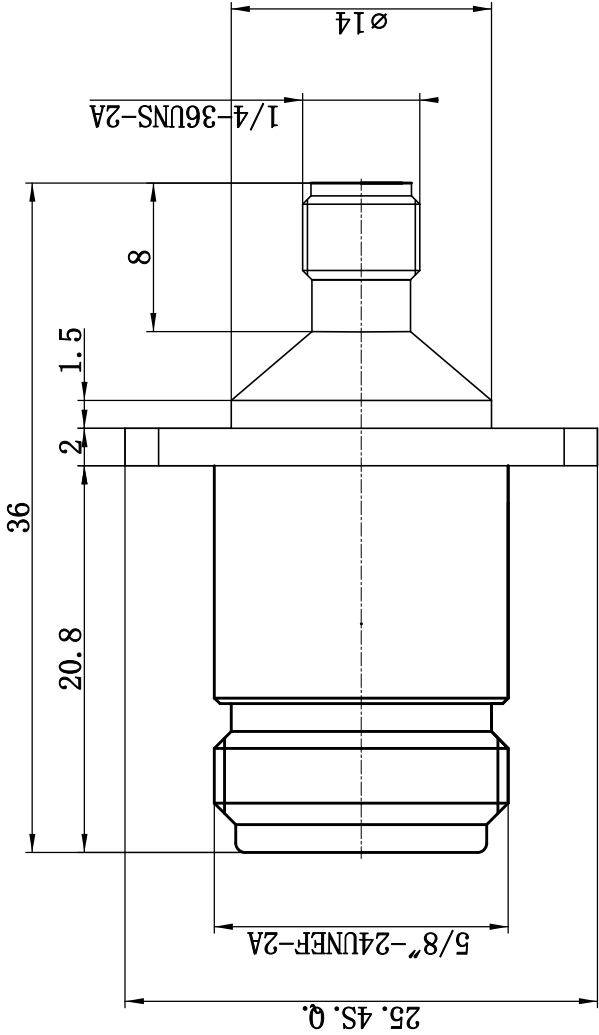

- 1 Electrical
 - 1.1 Impedance: 50 Ω
 - 1.2 Frequency: DC-18GHz
 - 1.3 VSWR: 1.25:1
- 2 Mechanical&Environmental
 - 2.1 Temperature range -45° C ~+125° C
 - 2.2 Durability(matings) >500
 - 2.3 RoHS Compliant Yes
- 3 Material&Finish
 - 3.1 Pin contact: Beryllium-Copper, gold plated
 - 3.2 Body: Stainless Steel(SU303), Passivated
 - 3.3 Insulators: PEI
- 4 Interface Standards
 - 4.1 SMA MIL-STD-348A
 - 4.2 N MIL-STD-348A

- Notes:
- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
 - 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 1/8/14	TITLE:			
ENGINEER: C. Tao 1/8/14	Precision Adapter			
APPROVED: W. Qiang 1/8/14	N Female to SMA Female Flange			
TOLERANCES UNLESS OTHERWISE SPECIFIED	DIMENSION IN MILLIMETERS (mm)			
X ±0.50		SCALE: N/A	SHEET: 1/1	REV: A
.X ±0.20				
.XX ±0.10				
ANGLES ±1°				
	SIZE: A4	PART NO: N/SMA-KFKG		
</				

