

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical

1.1 Impedance
1.2 Frequency
1.3 VSWR


2 Environmental & Mechanical

2.1 Temperature range
2.2 RoHS Compliant
2.3 Durability
- 50 Ω
DC-2GHz
13:1

-55 $^{\circ}$ C ~ +125 $^{\circ}$ C
>500 cycles

- 3 Materials & Plating

3.1 Body:
3.2 Insulator:
3.3 Contact Pin:
- Brass, Nickel Plated
Teflon
Phosphor bronze, Gold plated

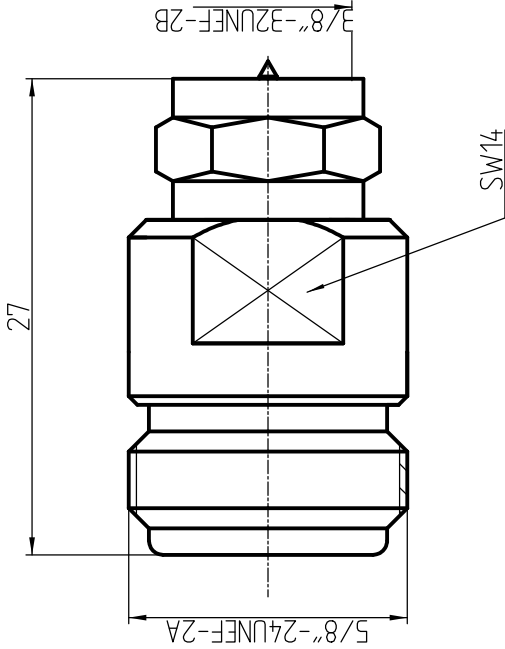

Notes:

- 1 ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2 CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 2/6/16	TITLE:		RF Coaxial Connector		www.terulilai.com	
ENGINEER: C.Tan 2/6/16			N Female to F Male Adapter			
APPROVED: W.Qiang 2/6/16			PART NO: N/P-KJ		SIZE: A4	
TOLERANCES UNLESS OTHERWISE SPECIFIED		X ±0.50		SCALE: N/A		
XX ±0.20		XX ±0.10		SHEET: 1/1		
ANGLES ±1°				REV: A		