

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV		DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release			T.Shihua	18/7/13	18/7/13

1 Electrical


- 1.1 Impedence 50Ω
- 1.2 Frequency 0~11GHz
- 1.3 Dielectric withstanding voltage 1000V(volts RMS)
- 1.4 Center contact resistance ≤ 3MΩ
- 1.5 Outer contact resistance ≤ 2MΩ
- 1.6 Insulation resistance: ≥5000MΩ

2 Environmental&Mechanical

- 2.1 Temperature range -55℃~155℃
- 2.2 RoHs Compliant
- 2.3 Durability >500 cycles

3 Materials&plating

- 3.1 Body: Brass, nickel plated
- 3.2 Insulator: Teflon
- 3.3 Contact Pin: Beryllium copper, Gold plated
- 3.4 Coupling nut: Brass, Gold plated
- 3.5 Spring: Phosphor bronze, nickel plated
- 3.6 Gasket: Silicon Rubber

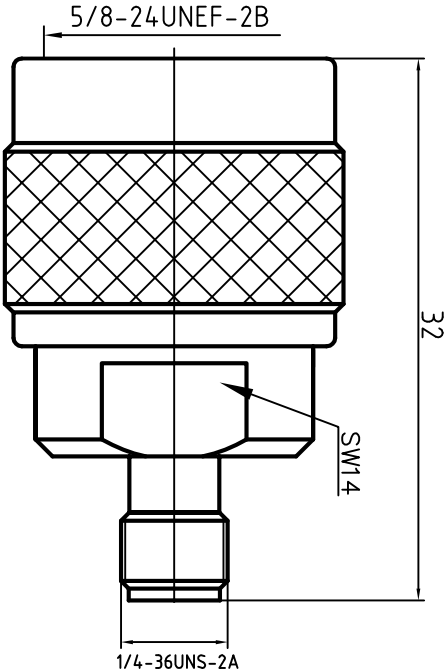

Notes:

- 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 18/07/13	TITLE: N/SMA-JKB	 ® www.treltech.com
ENGINEER: C.Too 18/07/13		
APPROVED: W.Qiang 18/07/13	N male to SMA female adaptor	
TOLERANCES UNLESS OTHERWISE SPECIFIED		
X ±0.50		
XX ±0.20		
ANGLES ±1°		
PART NO: TRL-NMSMAF-0210	SIZE: A4	SCALE: 1:1
	SHEET: 1/1	REV: A