


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

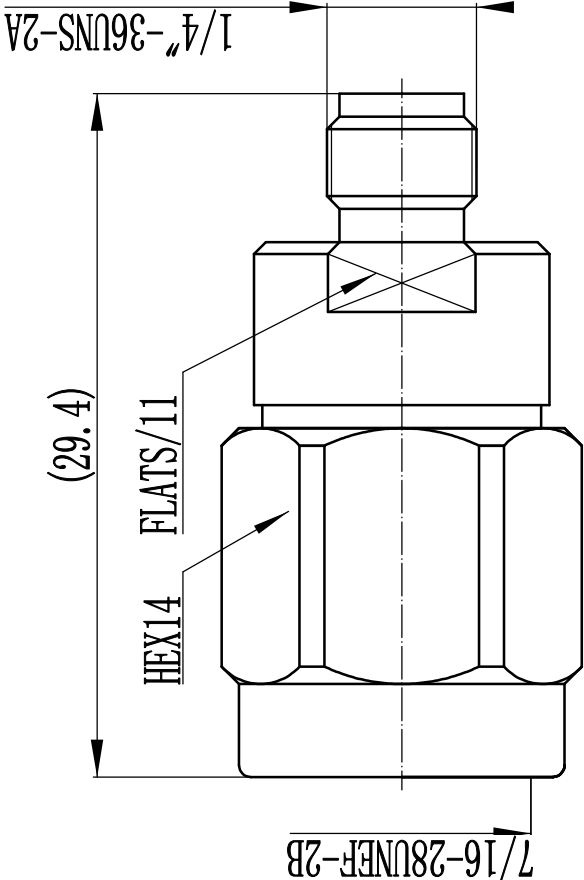

- 1 Electrical
- 1.1 Impedance: 50  $\Omega$
  - 1.2 Frequency: DC-11GHz
  - 1.3 VSWR: 1.25:1
- 2 Mechanical&Environmental
- 2.1 Temperature range: -45°C ~+125°C
  - 2.2 Durability(matings) >500
  - 2.3 RoHs Compliant Yes
- 3 Material&Finish
- 3.1 Pin contact: Bronze, gold plated
  - 3.2 Body: Brass,Suco-plated
  - 3.3 Insulators: Teflon
  - 3.4 Coupling Nut: Brass, Suco-plated

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

|                                       |       |                                |            |
|---------------------------------------|-------|--------------------------------|------------|
| DRAWN: T. Shihua 26/8/16              |       | TITLE:                         |            |
| ENGINEER: C. Tao 26/8/16              |       | Precision Adapter              |            |
| APPROVED: W. Qiang 26/8/16            |       | TNC Male to SMA Female Adaptor |            |
| TOLERANCES UNLESS OTHERWISE SPECIFIED |       | PART NO: TNC/SMA-JK            |            |
| X                                     | +0.50 | SIZE: A4                       | SCALE: N/A |
| .X                                    | +0.20 | SHEET: 1/1                     | REV: A     |
| .XX                                   | +0.10 |                                |            |
| ANGLES                                | *°    |                                |            |



www.tenulai.com



DIMENSION IN MILLIMETERS (mm)