

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical 电气性能
- 1.1 Impedance 特性阻抗: 50 Ω

1.2 Frequency 频率范围: DC~300MHz

1.3 VSWR 电压驻波比: ≤1.30

1.4 Insertion Loss (dB): ≤0.05xSqt. (f_GHz)

1.5 Insulation resistance 绝缘电阻: ≥5000MΩ


1.6 Dielectric withstanding voltage 介质耐压: 1500V
- 2 Environmental & Mechanical 环境与机械性能
- 2.1 Temperature range 温度范围: -55℃~+125℃

2.2 RoHs Compliant 符合RoHs

2.3 Durability 寿命: >500 cycles (次)
- 3 Materials & Finish 材料与涂镀
- 3.1 Body 外壳: Brass, nickel plated 黄铜, 镀镍

3.2 Insulator 绝缘介质: Teflon 聚四氟乙烯

3.3 Contact Pin 中心导体: Bronze, Gold plated 锡青铜, 镀金

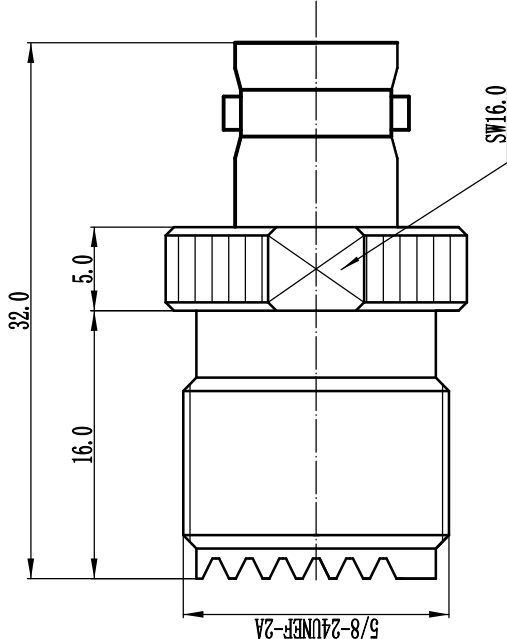

- Notes:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 29/04/21		TITLE: RF Adaptor	 www.rf-connector-china.com
ENGINEER: C. Tao 29/04/21			
APPROVED: W. Qiang 29/04/21			
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°			
PART NO: UHF-BNC-KK		DIMENSION IN MILLIMETERS (mm)	
SIZE: A4		SCALE: N/A	SHEET: 1/1
REV: A		4	