


Diagram of a beam of length L with a point load P at the center. The beam is supported at both ends, labeled A and B. An upward arrow labeled P is at the center.

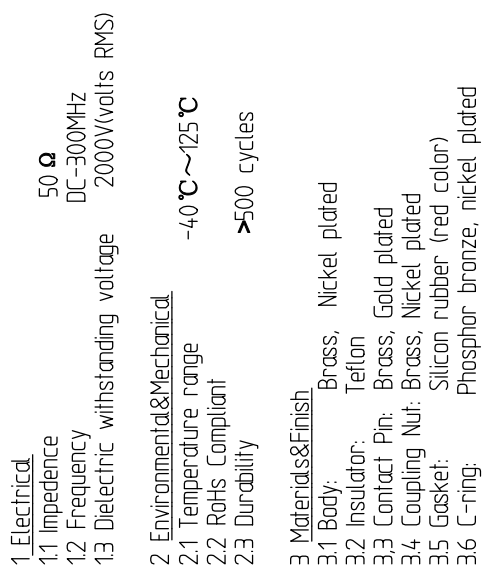

DRAWN: T. Shihua 29/04/21	TITLE: RF Adaptor UHF Female to SMA Female Adaptor			DIMENSION IN MILLIMETERS (mm)	www.rfconnectorchina.com
ENGINEER: C. Tao 29/04/21					
APPROVED: W. Qiang 29/04/21					
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 X ±0.20 XX ±0.10 ANGLES ±1°	PART NO: UHF/SMA-KJ	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY