This document contains proprietary information and such informationmay not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	New Release	———	T.Shihua	29/04/21	29/04/21

1 Electrical电气性能

1.1 Impedance特性阻抗: 50Ω

1.2 Frequency频率范围: DC～300MHz

1.3 VSWR电压驻波比:≤1.30

1.4 Insertion Loss(dB):≤0.05xSqt.(f_GHz)

1.5 Insulation resistance绝缘电阻: ≥5000MΩ

1.6 Dielectric withstanding voltage介质耐压: 1500V

2 Environmental&Mechanical环境&机械性能

2.1 Temperature range温度范围: -55℃～+125℃

2.2 RoHs Compliant 符合RoHs

2.3 Durability寿命: >500 cycles（次）


3 Materials&Finish材料&涂镀

3.1 Body外壳:Brass,nickel plated 黄铜,镀镍

3.2 Insulator 绝缘介质:Teflon 聚四氟乙烯

3.3 Contact Pin中心导体:Brass,Gold plated 黄铜,镀金

3.4 Coupling Nut连接螺套:Brass,nickel plated 黄铜,镀镍

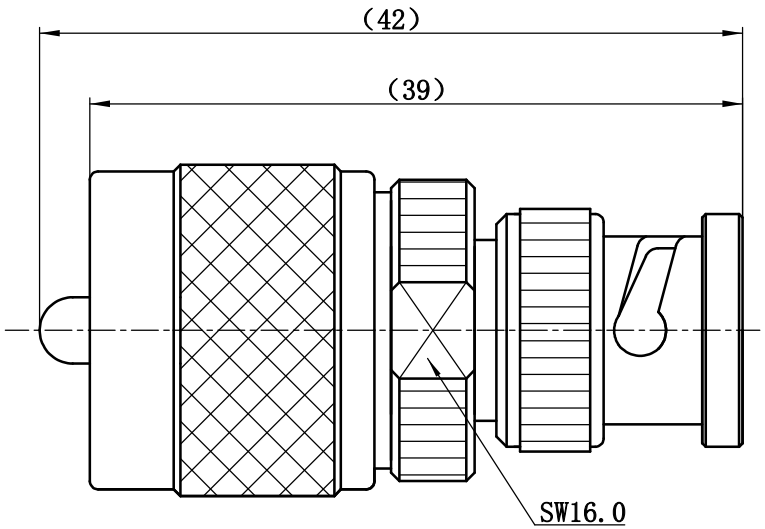

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 29/04/21	TITLE: RF Adaptor UHF Male to BNC Male Adaptor	www.rf-connector-china.com			
ENGINEER: C.Tao 29/04/21		DIMENSION IN MILLIMETERS (mm)			
APPROVED: W.Qiang 29/04/21					
TOLERANCES UNLESS OTHERWISE SPEFICIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	PART NO: UHF/BNC-JJ	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A