


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

1 Electrical

- 1.1 Impedance: 50 Ω
- 1.2 Frequency: DC~100MHz
- 1.3 VSWR: ≤2.10
- 1.4 Insulation resistance: ≥1000M Ω
- 1.5 Dielectric strength: 500V
- 1.6 Center contact ≤ 2.0M Ω
- 1.7 Outer contact ≤ 2.5M Ω

2 Materials&Finish

- 2.1 Inner Contact: Bronze, Gold plated
- 2.2 Outer Contact: Brass, Nickel plated
- 2.3 Insulators: PTFE

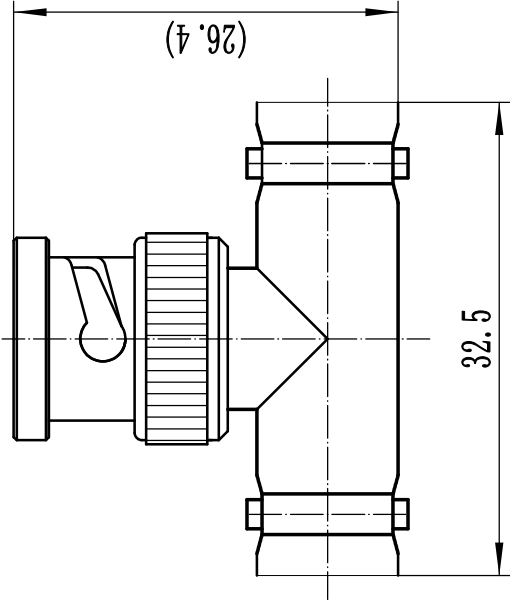

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

REV	DESCRIPTION OF REVISION	TEL NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	17/02/2022	17/02/2022

DRAWN: T. Shihua 17/02/2022		TITLE		www.rf-connector-china.com	
ENGINEER: C. Tao 17/02/2022		RF Coaxial Connector			
APPROVED: W. Qiang 17/02/2022		BNC Tee Adapter Female-Male-Female		DIMENSION IN MILLIMETERS (mm)	
TOLERANCES UNLESS OTHERWISE SPECIFIED		PART NO: BNC-KJK		SIZE: A4	
X ±0.50				SCALE: 2:1	
.X ±0.20				SHEET: 1/1	
.XX ±0.10				REV: 1/1	
ANGLES ±1°				VA	